

## CHANNEL VISION Limited Warranty



Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for two years from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, or alteration of the equipment. This warranty is extended only to the original purchaser, and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.

Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free. A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.


# CHANNEL VISION™ Model 6125

## Color IR illuminated Camera



**CHANNEL VISION™**  
234 FISCHER AVENUE • COSTA MESA, CA 92626  
(714) 424-6500 • (800) 840-0288 • (714) 424-6510 fax  
[www.channelvision.com](http://www.channelvision.com) • email: [sales@channelvision.com](mailto:sales@channelvision.com)

# Model 6125

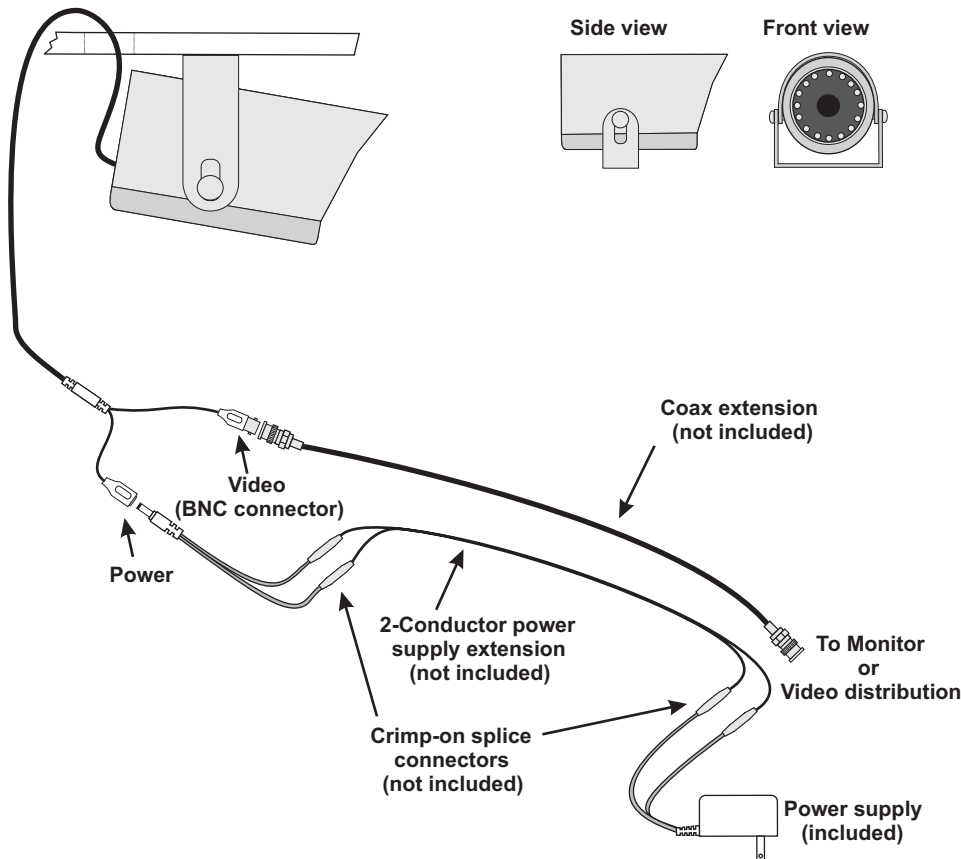

## Features:

- 1/3" Sony CCD**
- 380 Lines Of Resolution**
- 0 Lux Sensitivity**
- 3.6mm Lens**
- Power Supply Included**
- U-shaped mount Included**
- Weatherproof**
- Sun Shield Included**

## Specifications:

<b>Camera Lens:</b>	3.6mm
<b>Resolution:</b>	380 lines
<b>S/N Ratio:</b>	More than 48 dB
<b>Min Illumination:</b>	0.5 LUX @ F2.0 (Before IR is activated)
<b>Power Supply:</b>	12VDC regulated
<b>Power Consumption:</b>	210 mA
<b>Video Output:</b>	1 Vp-p @ 75 ohms
<b>Auto White Balance:</b>	Color Temperature: 2500K-9500K
<b>Scanning System:</b>	interlaced 2:1
<b>Gamma Characteristic:</b>	0.45
<b>Waterproof criterion:</b>	IP 67
<b>Dimensions:</b>	2.1"Dia. x 2.3"L (body only)
<b>Operating Temp:</b>	-10°C to 50°C (14°F to 122°F)

## Installation:

- Attach the camera mount to a wall or ceiling using the 3 screws provided.
- Drill a hole in the wall or ceiling for wiring (see diagram).
- If necessary, attach the camera's video output to a coax extension that is long enough to reach your monitor or video distribution equipment.
- If necessary, cut the connector off of the end of the power supply and splice in an extension using crimp-on connectors.

Specifications subject to change without notice.