

Insert

INSTRUCTIONS:

1. Locate the segments around on the outer edge of the timer's dial. These segments, each representing 30 minutes, can be pushed down from the edge of the dial (try using the tip of a pen or pencil). Conversely, segments that have been pushed down can be easily pushed back up by hand. **Be sure all segments are pushed up before programming.**
2. Select a time period (or periods) you want the lamp turned on, then push down ALL the segments that fall on or within that time period. For example, to have the timer turn a lamp on at 10PM and off at 2AM, push down the segments representing 10PM and 2AM, and ALL the segments in between (See Figure 1). You may need to turn the dial clockwise to access the desired segments.
3. Rotate the timer's dial clockwise until the pointer on the face of the dial points to the current time of day. Note: Nighttime hours (from 6:30PM to 6:30AM) are highlighted with a black background.
4. Plug the timer into an electrical GFCI outlet convenient to the device to be controlled.
5. Plug the device into the outlet on the bottom of the timer. Turn the device's switch on for automatic control. The timer will not turn the device on if the device's switch is off. The device will now turn on and off at the times you have set.

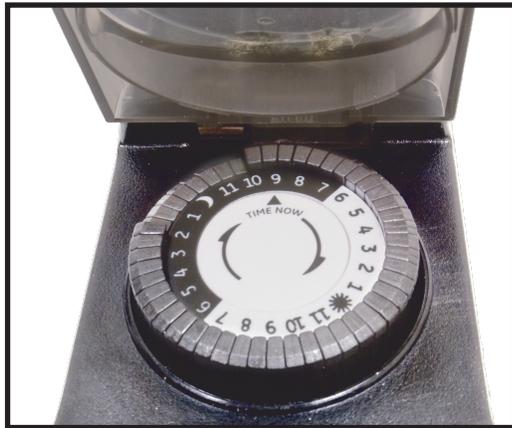


Figure 1

MADE IN CHINA

GE is a trademark of General Electric Company and is under license by Jasco Products Company LLC, 10 E. Memorial Rd., Oklahoma City, OK 73114.

This Jasco product comes with a 1-year limited warranty. Visit www.jascopeproducts.com for warranty details and product registration.

Questions? Contact us at 1-800-654-8483 between 7:30AM—5:00PM CST.

15138
Version 2
04/25/2014