

Garage Door Receiver


Model R3R

1. INTRODUCTION

Skylink's universal receiver, Model R3R is designed to operate most garage door and gate operators. Operating voltage is 12V to 24V AC or DC.

2. INSTALLATION

1. Wiring connection:
Red wire – connect to 24V
White wire – connect to common
Black wire – relay output, connect to relay
2. Antenna Wire:
Please DO NOT remove this gray wire, ensure it is in up-right position to receive data signals from the transmitter.
3. Learn button – To program or erase the transmitter.
4. Red LED light – Indication of the status.
Stays on - when the receiver is powered
Flashes slowly – learning a transmitter
Flashes rapidly – erase the learned transmitter(s)

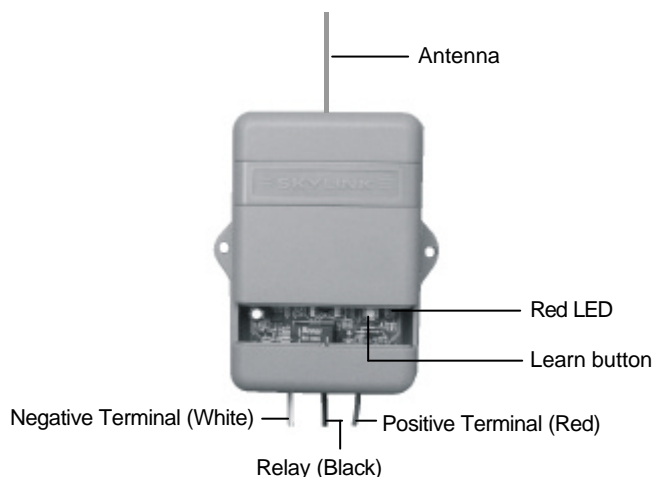

3. PROGRAM A TRANSMITTER TO THE RECEIVER

You can program up to 6 single-button remotes to the receiver. To program remote, follow the instructions below.

1. Ensure power is connected, the red LED is on.
2. Pry off the bottom cover, press and release the Learn button on the receiver unit. The red LED on the receiver will flash slowly.
3. Press the desired button on the remote that you want to program to the receiver.
4. The receiver red LED stop flashing and stay on indicates the programming is completed.
5. To program another transmitter to control the receiver, repeat the process.
6. Put the bottom cover back on.

4. ERASE THE TRANSMITTER FROM THE RECEIVER

To erase the unwanted transmitter, all the programmed transmitters must first be erased. Then reprogram each transmitter you wish to keep.

1. Program the remotes you want to use to the receiver.
2. Press and hold the Learn button for "6" seconds, the red LED will flash rapidly. This indicates all the learned remote have been erased, then you may release the Learn button.
3. Program the remotes you want to use to the receiver.

5. ACCESSORIES

Optional accessories can be added to the Receiver. Skylink offers Keychain Transmitter Model R3-T4 and R3-T2 to work with your Receiver. For more information, please visit our website at www.skylinkhome.com or contact us.

6. FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

7. WARNING

- To prevent possible SERIOUS INJURY or DEATH from a closing garage door:
- Activate door ONLY when it can be seen clearly, is properly adjusted, and there are no obstructions to door travel.
 - ALWAYS keep garage door in sight until completely closed. NEVER permit anyone to cross path of closing garage door.

8. WARRANTY

If, within one year from date of purchase, this product should become defective (except battery), due to faulty workmanship or materials, it will be repaired or replaced, without charge. Proof of purchase and a Return Authorization are required.

9. CUSTOMER SERVICE

If you would like to order Skylink's products or have difficulty getting them to work, please :

1. visit our FAQ section at www.skylinkhome.com, or
2. email us at support@skylinkhome.com, or
3. call our toll free at 1-800-304-1187 from Monday to Friday, 9 am to 5 pm EST.
Fax (800) 286-1320



CUSTOMER SERVICE

17 Sheard Avenue, Brampton, Ontario, Canada L6Y 1J3
Email: support@skylinkhome.com
<http://www.skylinkhome.com>
P.N. 101A438
©2006 SKYLINK GROUP