


VEHICLE ALERT™



Driveway warning system with enhancement modules does it all

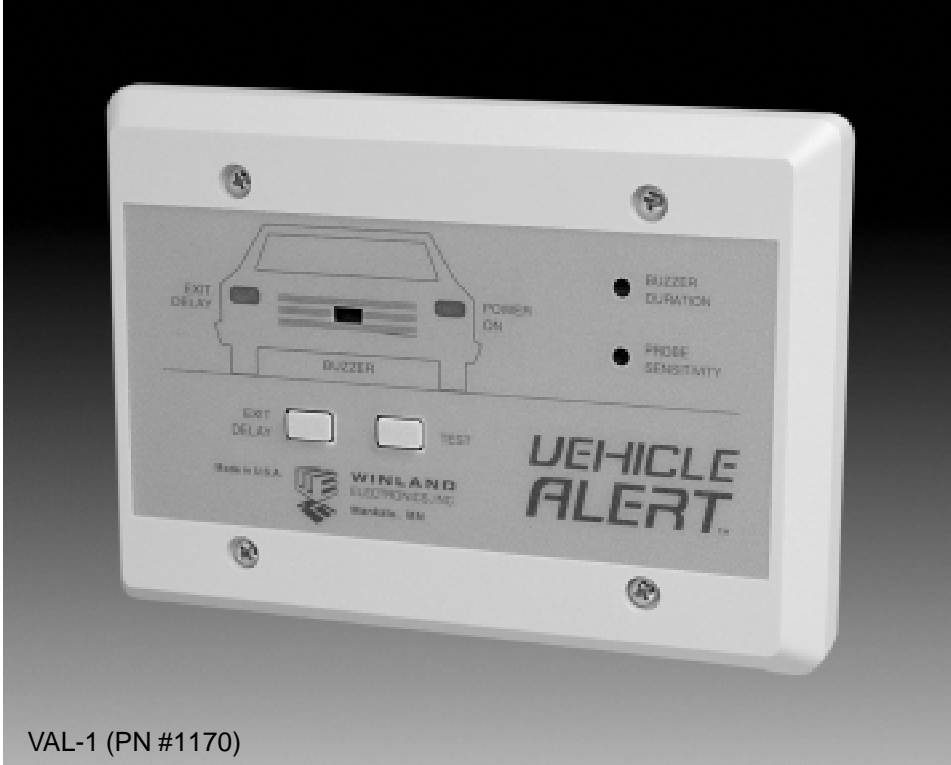

VAL-1 (PN #1170)

ADDITIONAL FEATURES INCLUDE:

- Two auxiliary form A relays for switching on lights, alarms, cameras, bells, X-10, etc.
- Probes available with 10', 100', 200', 350', 500' & 1000' lengths of cable. Maximum run is 2,500'
- Adjustable probe sensitivity
- Built-in audible alarm
- Use up to two underground sensor probes
- Optional light switching module (part #1174). Automatically switches on 110VAC lighting. Includes photo-cell, adjustable timer, and 1-gang wall plate.
- Additional audible alarm modules (Part #1175). Will sound an audible alarm in a location away from the control console.

You're alone at night and suddenly, without warning, someone knocks at your front door. "Who is it?" It could be a friend or relative – but then again it could be... who knows? You can now avoid this type of frightening situation with the new Vehicle Alert™ System. Don't be caught by surprise again because the Vehicle Alert™ will sound a pleasant electronic alarm whenever a vehicle enters your property. Perfect for people who want low-cost protection for their homes, business, farms, etc... To install, simply bury the probe 6" to 8" underground beside your driveway and run the wire back to your house, then mount the console inside wherever you wish. The probe and wire are weatherproof.



**WINLAND
ELECTRONICS, INC.**

Your Environmental Security Specialists®

SPECIFICATIONS FOR VEHICLE ALERT™




1174



1175

SPECIFICATION	VALUE
Power Requirements	Regulated 10-14 VDC @ 100 mA
Current Draw (No accessories)	Resting: 40 mA • Alarm: 70 mA
Buzzer Duration	1 to 18 seconds
Buzzer Sound Pressure Level	88 db minimum @ 30 cm @ 12 VDC
Exit Delay	Fixed @ 6 minutes
Outputs	2 SPST relay outputs
Output Contact Rating	500 mA
Console Size	6.55" x 4.7" x 1" (16.6 cm x 11.9 cm x 2.5 cm)
Console Operating Temperature	32° to 130° F (0° to 54° C)
Weight (Console, probe, 100' cable & transformer)	5.8 pounds (2.63 Kg)
Cable Type	Direct burial 22 AWG shielded twisted pair with ground wire
Maximum Cable Length	2500 ft. (762.5 meters)
Maximum Number of Probes	2
Alarm Console Mounting	Mounts to 3-gang electrical box

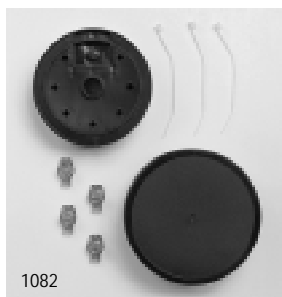

1082

PART NUMBERS & ACCESSORIES

DESCRIPTION	PART #
Complete Vehicle-Alert System (Console, probe, 100' cable & transformer)	1172
Vehicle-Alert Console and Transformer	1173
Vehicle-Alert Console	1170
100' Probe	1012
10' Probe	1012-01
200' Probe	1012-02
350' Probe	1012-03
500' Probe	1012-05
1000' Probe	1012-10
Additional Cable	W1005
Splice Kit	1082
Light Switching Module	1174
Remote Annunciator	1175
Plastic 3 Gang SMT Electrical Box	1110
Metal 3 Gang SMT Electrical Box	L-018-0001



1172



Mfg. in U.S.A. by:
 Winland Electronics, Inc.
 1950 Excel Drive
 Mankato, MN, 56001, U.S.A.
 Phone: (507) 625-7231
 Fax: (507) 387-2488
www.winland.com