

1. Introduction

The Legrand AU5015-xx lyriQ™ iPod™ Charge and Play Kit (see **Figure 1**) consists of three components: the Charging Main Source Input, the Portable Music Player Desktop Stand and a 6' cable which goes from the headphone jack on the user supplied portable mp3 player to the left and right RCA jacks on the Charging Main Source Input. The Charging Main Source Input may be used instead of the AU1004-xx Flush Mount Single Source Input as part of any lyriQ Multi-Source Audio Distribution System. The USB interface on the Charging Main Source Input is used to charge the user's portable device that is used as an audio source input, utilizing a user supplied USB cable.

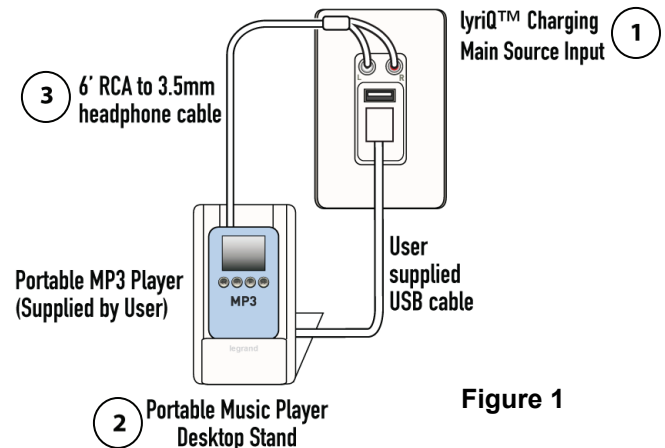


Figure 1

2. Description

- Provides one Charging Main Source Input, which includes the decorator wall plate. This Charging Main Source Input contains a left and right RCA jack for input from an mp3 player, and a USB connector which is used to charge the user's device (.5A @ 5V or up to 2.5 watts is provided). This USB interface is used to charge mp3 portable devices, including Apple iPhones™ and iPods™.
- NOTE: This output cannot be used to charge the Apple iPad™.**
- Provides one 6' (six foot) cable with left and right RCA plugs on one end, and a 3.5mm stereo headphone plug on the other end which plugs into the user's portable device headphone output jack.
- Provides one Portable Music Player Desktop Stand that is used to hold the user's portable mp3 device.

NOTE: The Charging Main Source Input does not have IR input or output capability.

The AU5015-xx lyriQ™ iPod™ Charge and Play Kit typically resides at the entertainment center or other location where a portable audio source device may be used and is connected to the enclosure mounted lyriQ Four Source, Eight Zone Distribution Module using a single Category 5 cable run (see **Figure 3**). The Charging Main Source Input receives stereo audio output from the headphone output of the portable audio source equipment. It provides RCA jacks for audio source input and the volume control on the user device itself will control the gain in a single or multi-source application.

3. Installation

IMPORTANT: Read the documentation that is included with all associated lyriQ™ products before installation. If you are unsure of any of the following installation procedures contact Legrand Technical Support @ 1-800-321-2343 option 1 or contact a Legrand installer.

NOTE: The lyriQ™ iPod™ Charge and Play Kit, like other Legrand lyriQ™ Audio system components, is powered by the Legrand lyriQ™ Four Source, Eight Zone Distribution Module.

- Run a Category 5 cable from a low voltage bracket at the room location containing the lyriQ™ iPod™ Charge and Play Kit (typically the entertainment center location) to the lyriQ™ Four Source, Eight Zone Distribution Module located in the Enclosure.
- Make sure that the Power Supply is not connected to the Distribution Module at this time.

- C. Pull the Category 5 cable out through the low voltage bracket and plug it into the RJ45 Cat 5e jack on the rear of the Charging Main Source Input (see **Figure 2**). Then mount the Charging Main Source Input into the low voltage bracket and cover with the supplied wall plate.
- D. Connect the 3.5mm headphone plug on the supplied cable to a portable mp3 player's headphone output jack, and the RCA plugs on the other end of the supplied cable to the RCA connectors on the Charging Main Source Input. To also charge the portable device at the same time, connect the device's USB interface cable to the USB interface on the Charging Main Source Input. There is an adjustable slot provided on the Portable Music Player Stand to accommodate the USB cable on the portable device. To adjust the slot, simply push in both tabs on each side of the stand.
- E. Check all other system components and then apply power to the lyriQ™ Four Source, Eight Zone Distribution Module in the Enclosure.

