

4-Channel CCTV “Brick” Power Supply

PA-U0405-NULQ

4 Outputs, Total supply current: 5A

The **PA-U0405-NULQ** is a 4-channel 5-Amp power supply. While normally used in CCTV installations, it is suitable for a wide variety of both CCTV and access control applications. It features adjustable output voltage and built-in 6.8-Amp overcurrent protection.

Features:


- 4-Channel 5-Amp power distribution
- Can be mounted with the bracket for easy access and reduced power cord clutter
- Universal input voltage: 100~240 VAC
- Adjustable output voltage: 12~13.8 VDC
- Built-in 6.8-Amp overcurrent protection.
- High voltage and over-current protection
- LED Power indicator



Specifications:

Outputs	4
Total supply current	5A
Max. output power	60W
Over current protection	12VDC/6.8A
Output voltage	12~13.8 VDC
Input fuse	3.15A@250VAC
Input voltage	100~240 VAC
Dimensions	5 ⁷ / ₈ "x2 ³ / ₁₆ "x1 ⁵ / ₁₆ " (150x55x33 mm)
Weight	13.4-oz (380g)
Operating temperature	14°~113° F (-10°~45° C)

Overview:

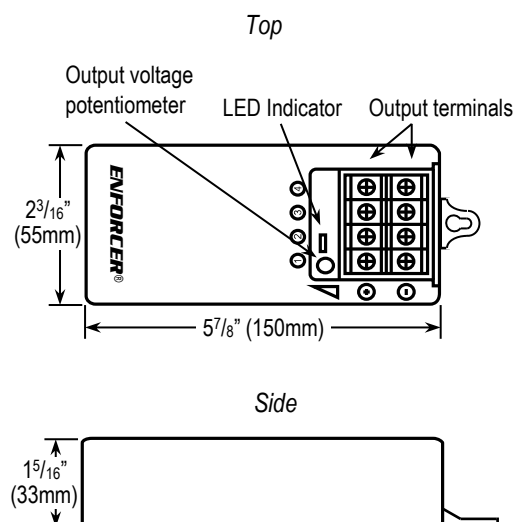

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PiPA-U0405-NULQ_150205.docx