



Installation Instructions RIB-7, RIB-62 & RIB-82

Slide bracket along straps to achieve desired position.
The straps have perforations running their length with one inch spacing.


The bracket has a series of 8 indexing holes per strap location allowing it to be indexed at 1/8" intervals, as the bracket slides along the straps note that with each 1/8" of travel one of the 8 indexing holes comes into alignment with one of the 1" spaced holes on the strap. Sheet metal screws are provided to fix the bracket in the desired location.

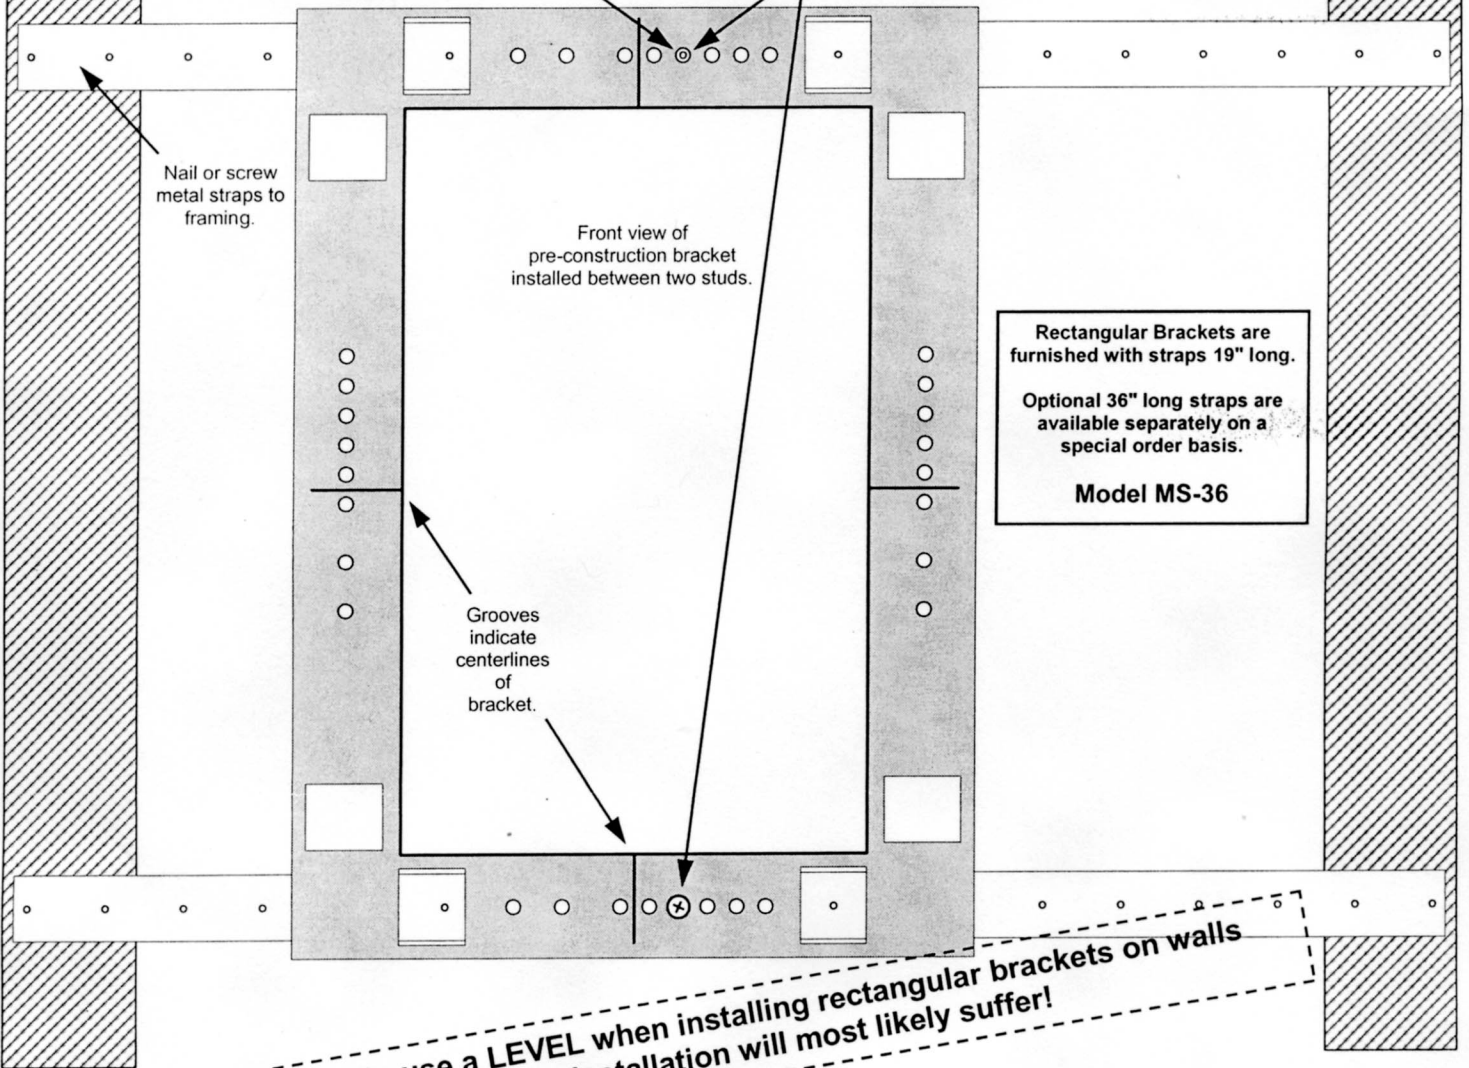

Be certain to use a LEVEL when installing rectangular brackets on walls or the final installation will most likely suffer!

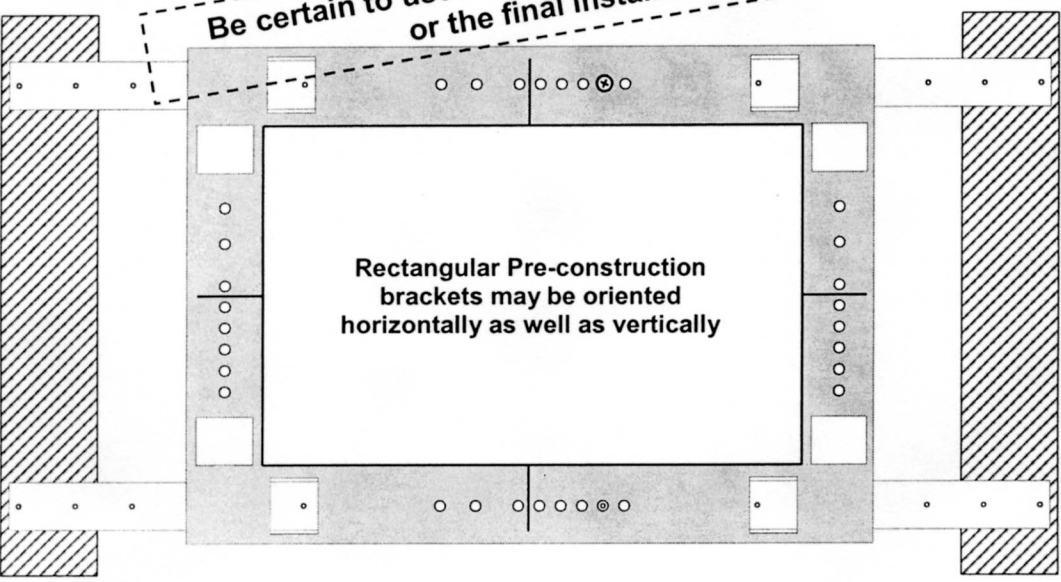

Side view of pre-construction bracket.

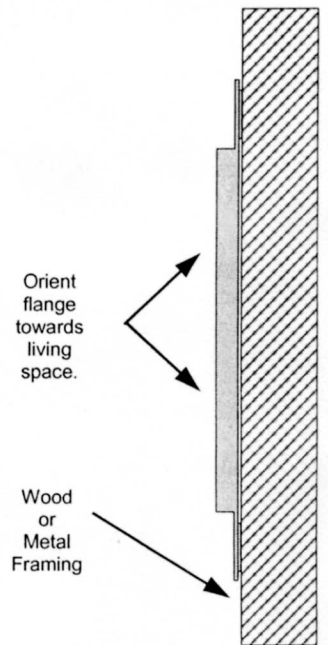

OEM Systems Co., Inc.

740 Freeport Boulevard, #106
Sparks, NV 89431-6168

(775) 355-0405 fax: (775) 355-0646

www.oemsystems.com info@oemsystems.com

Product materials & specifications are subject to change / improvement