


## Installation Instructions

### 1x4 Combo Phone and Data Module

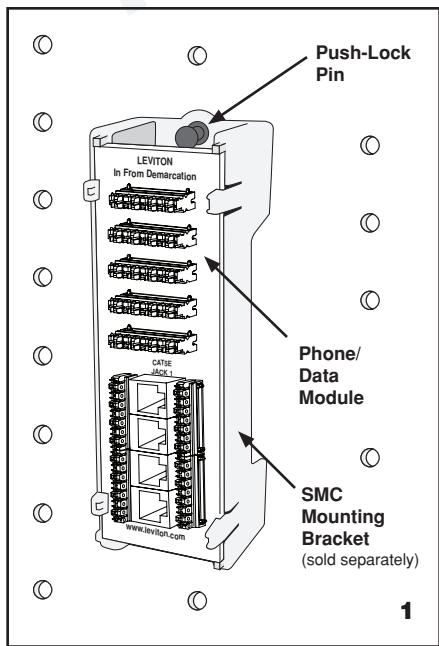

### 1x4 Combo Phone and Data Module

#### DESCRIPTION

The 1x4 Combo Phone and Data Module features 5 sets of 110 IDC punchdowns. Any set can be used as the "input" set, bridging up to four lines of telephone service to the other four sets. UTP cable can be punched down on each of the four "output" sets to distribute service to remote locations throughout the house.


#### INSTALLATION

To install, simply snap the 1x4 Combo Phone and Data Module into the mounting bracket (**Cat. No. 47612-SBK - sold separately**) and align the Push-Lock Pins with the grid holes of the SMC. Module may be mounted horizontally or vertically. With the Push-Lock Pins in the "out" position, press the unit into the grid in the desired location and secure by pushing the Push-Lock Pins "in" (**refer to Figure 1**).

#### 110 IDC Wiring Termination:

Using an industry standard punchdown tool, wire the 110 IDC connectors per the T568A wiring configuration as shown below. The wall jack should also comply with this configuration for both phone and data wallplates.

**NOTE:** Blue = Line 1  
Orange = Line 2  
Green = Line 3  
Brown = Line 4



White / Blue  
Blue  
White / Orange  
Orange  
White / Green  
Green  
White / Brown  
Brown

Route and terminate up to four Category 5 or Category 5e cables from the wall jacks to the 4-Pair 110 IDC connectors lining the sides of the board using an industry standard punchdown tool. Each cable should be fully terminated (all four pairs) on one of the 110 IDC connectors.

#### APPLICATION:

**For data:** Identify the cable you wish to activate and connect one end of a Category 5 or 5e patch cord into the corresponding module port and the other end into an installed data switch or router.

**EXAMPLE:** You have a computer and a printer in your home office, and want to access the printer from computers in two bedrooms.

- Route cables to the two office jacks (for the office computer and printer) to corresponding 110 IDC connectors for Ports 1 & 2.
- Route cables to the bedroom jacks (for the two bedroom computers) to corresponding 110 IDC connectors for Ports 3 & 4.
- Install Category 5 or 5e patch cords from ports 1, 2, 3 and 4 on the module to ports on a data switch or router (follow manufacturer's instructions). The 3 computers and the printer will now be networked (a print server may be required).

## IMPORTANT INSTRUCTIONS

1. Read and understand all instructions. Follow all warnings and instructions marked on the product.
2. Do not use this product near water—e.g., near a tub, wash basin, kitchen sink or laundry tub, in a wet basement, or near a swimming pool.
3. Never push objects of any kind into this product through openings, as they may touch dangerous voltages.
4. SAVE THESE INSTRUCTIONS.

## SAFETY INFORMATION

1. Never install communications wiring or components during a lightning storm.
2. Never install communications components in wet locations unless the components are designed specifically for use in wet locations.
3. Never touch uninsulated wires or terminals unless the wiring has been disconnected at the network interface.
4. Use caution when installing or modifying communications wiring or components.
5. To prevent electrical shock, each opening must be filled with a module.

### LIMITED 2 YEAR WARRANTY AND EXCLUSIONS

Leviton warrants to the original consumer purchaser and not for the benefit of anyone else that this product at the time of its sale by Leviton is free of defects in materials and workmanship under normal and proper use for two years from the purchase date. Leviton's only obligation is to correct such defects by repair or replacement, at its option, if within such two year period the product is returned prepaid, with proof of purchase date, and a description of the problem to **Leviton Manufacturing Co., Inc., Att: Quality Assurance Department, 59-25 Little Neck Parkway, Little Neck, New York 11362-2591**. This warranty excludes and there is disclaimed liability for labor for removal of this product or reinstallation. This warranty is void if this product is installed improperly or in an improper environment, overloaded, misused, opened, abused, or altered in any manner, or is not used under normal operating conditions or not in accordance with any labels or instructions. **There are no other or implied warranties of any kind, including merchantability and fitness for a particular purpose**, but if any implied warranty is required by the applicable jurisdiction, the duration of any such implied warranty, including merchantability and fitness for a particular purpose, is limited to two years. **Leviton is not liable for incidental, indirect, special, or consequential damages, including without limitation, damage to, or loss of use of, any equipment, lost sales or profits or delay or failure to perform this warranty obligation.** The remedies provided herein are the exclusive remedies under this warranty, whether based on contract, tort or otherwise.

For Technical Assistance Call:  
1-800-824-3005 (U.S.A. Only)  
[www.leviton.com](http://www.leviton.com)



*Building A Connected World*

59-25 Little Neck Parkway,  
Little Neck, N.Y. 11362-2591, USA  
Tech Support: 800-824-3005  
[www.leviton.com](http://www.leviton.com)

DI-220-47609-00A-X0

## LEVITON ARTWORK SPECIFICATIONS

- Artwork No/Rev Level: DI-220-47609-00A-X0
- Color(s): Black over \_\_\_\_\_
  - 1. \_\_\_\_\_ 2. \_\_\_\_\_
  - 3. \_\_\_\_\_ 4. \_\_\_\_\_
  - 5. \_\_\_\_\_ 6. \_\_\_\_\_
- Font Families: Helvetica
- Material Type: 50 lb. offset
- Coating:
  - Aqueous Gloss
  - Blister Coating (Wax Free Inks)
  - Gauge: \_\_\_\_\_

## DOCUMENTATION

- ECO No.: N/A
- Art Revision Description: \_\_\_\_\_
- Artist: H2D Date: 09/15/06

The information in this document is the exclusive PROPRIETARY property of LEVITON MANUFACTURING COMPANY, INC. It is disclosed with the understanding that acceptance or review by the recipient constitutes an undertaking by the recipient. (1) to hold this information in strict confidence, and (2) not to disclose, duplicate, copy, modify, or use the information for any purpose other than that for which disclosed.

Copyright © 1997 Leviton Mfg. Co. Inc.  
Unpublished, All Rights Reserved

## FOLD SCHEME

