


# EZ-SnapJack™ Instructions


©2009 Platinum Tools Inc. All rights reserved. 6/09

# PLATINUM TOOLS


- 1) Remove 2-3" of the outer jacket from your cable using the Cat5 & Cat6 Cable Jacket Stripper, P/N 15015. **Note:** There is a CAT5e and a CAT6 version of the EZ-SnapJack. Make sure you are using the proper version for your cable.




- 2) Separate pairs and lay out per the T568A or T568B specification required for your application. Use the convenient color chart on the EZ-SnapJack wire guide to assist you.

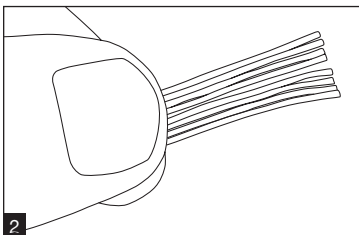


- 3) Insert the conductors through the holes in the wire guide making sure to keep them in the proper color code order.

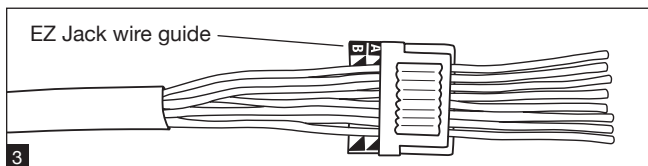


- 4) Slide the wire guide all the way down to the outer cable jacket so that it fits up against the twisted pairs of the cable.

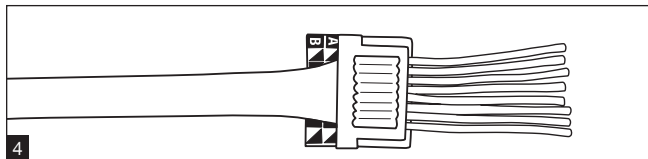



- 5) Cut off the extra wire extending from the guide so that it is flush with the wire guide edge using the Flush Cutter, P/N 10531.

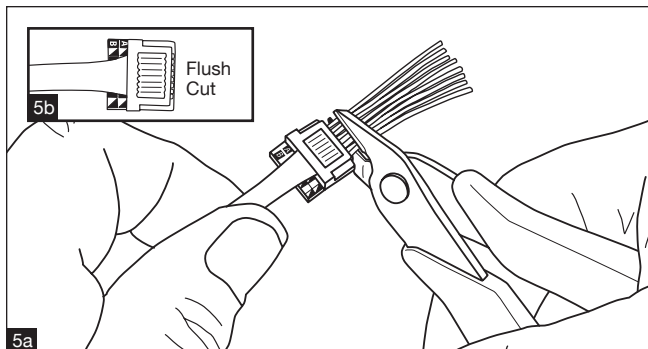



- 6) Open the EZ-SnapJack so that the hinge is on the top.

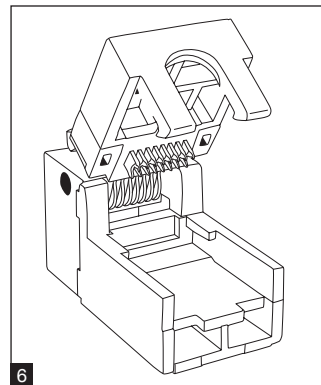

- 7) Insert the prepped cable into the jack so that the color chart on the wire guide faces up and push it all the way forward so it is flush with the EZ-SnapJack. Hold it in this position.

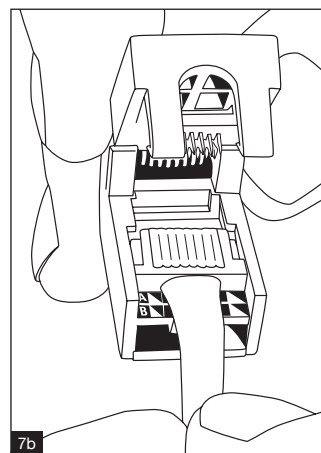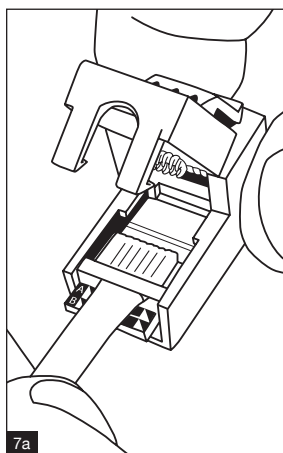

- 8) Push down on the EZ-SnapJack until it snaps completely shut.



- 9) Snap the terminated EZ-SnapJack into the backside of the wall plate.

