

Low Profile TV BRIDGE™ KIT

NEW!
more on
reverse


For Flush-to-the-Wall TV Installations on Walls 3/4" Deep and Larger



**Roomy 5" x 8" boxes
accommodate
multiple cables...
Low-Voltage Wires
Run Behind Wall**


Low profile
recessed
boxes

**TVL2508K
TV BRIDGE™ KIT**

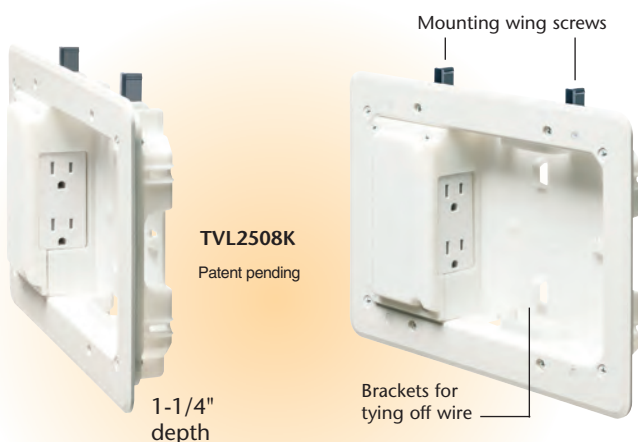

1-1/4" depth

Brackets for
tying off wire

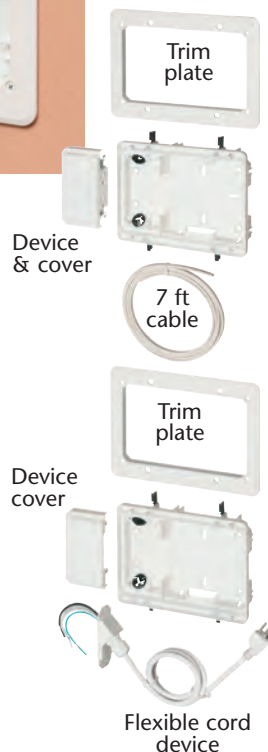

Device
& cover

7 ft
cable

Device
cover

Flexible cord
device

Save time and money with Arlington's TV Bridge™ KIT with low profile boxes. This all-in-one package is ideal for flat screen TV installations on 1/2" or 5/8" drywall with wall cavity depths 3/4" and larger.

Applications in new work or retrofit include:

- Furring strips on concrete block walls
- 2x2, 2x3 and 2x4 or larger studs



The low profile box is also helpful when plumbing or other obstructions run behind the wall.

It has lots of room inside for multiple cables, and brackets for tying them off.

- Plugs stay inside upper box so TV mounts closer to the wall
- Mounting wing screws hold boxes securely in the wall
- Kit includes all you need to install a flat screen TV close to a wall and connect to additional components: two recessed TVL508 boxes, 7 ft of non-metallic cable, a flexible cord device and an outlet device

Scan for Details



TVL2508K

Arlington



1 Stauffer Industrial Park
Scranton, PA 18517

800/233.4717

Fax 570/562.0646


www.aifittings.com

Low Profile TV BRIDGE™ KIT



For Wall Cavities 3/4" Deep and Larger

Installation of the **TVL2508K Low Profile TV Bridge Kit** is quick and easy. Just cut two openings in the wall, near a power source. *There's no need to run power from a panel box or to cut into framing members.*

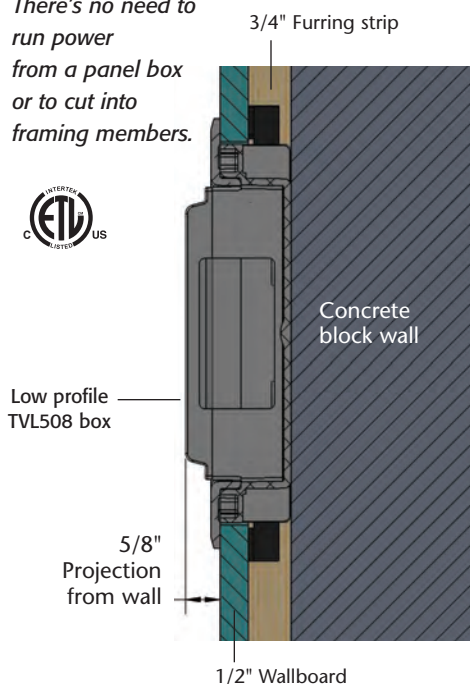

UPPER Box installation

- 1 Cut Top hole in wall for the TV Box.
Cut Lower hole directly below the top hole, close to an existing outlet.



- 2 Wire receptacle. Install cover. Drop assembly and cable through the top hole, feeding it toward the bottom hole. Insert box in top hole, pulling cables for TV through opening in box.



- 3 Tighten mounting wing screws to secure box to wall. As needed, attach box to block for added stability (see photo in 5 below).

Catalog Number	UPC/DEI/NAED Mfg. #018997	Description Low Profile TV Bridge	Unit/Std Pkg
TVL2508K	52305	5" x 8" power/low voltage recessed TV Bridge Kit	1
TVL2508KGC	52306	5" x 8" power/low voltage recessed TV Bridge Kit w ground clip for Canada	1

Scan for Details

Patent pending



TVL2508K




Arlington

1 Stauffer Industrial Park
Scranton, PA 18517
800/233.4717
Fax 570/562.0646
www.aifittings.com



LOWER Box installation

- 4 Attach power to lower device. Install device cover.
Insert second box in bottom hole, feeding cables through opening in top of box.
- 5 Tighten mounting wing screws to secure box to wall (see 3 above). As needed, attach box to block for added stability.

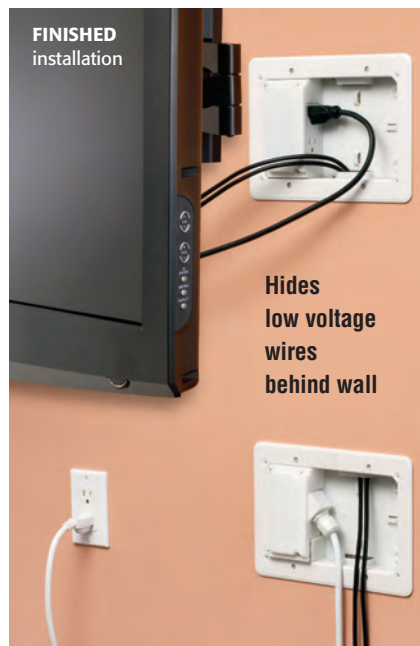

Distributed by