

## Low-Noise CCTV Power Supply

### PC-L1620-PQ

16 Outputs, Total supply current: 20A, Input current: 4A

The ENFORCER Low-Noise Switching CCTV Power Supply is designed for applications where noise is a problem due to inadequate wiring. Independently isolated and grounded outputs with integrated noise filtering and individually adjustable voltage help reduce noise interference when using 4K (8MP) HD cameras, non-PoE IP cameras, and analog security cameras.

### Features:

- Low-noise design for all CCTV applications where filtered power is needed, such as 4K (8MP) HD CCTV cameras, non-PoE IP cameras, and analog cameras
- 110/220 VAC input with 6kV surge protection
- Each output's voltage individually adjustable to compensate for voltage drop
- Outputs independently grounded with integrated noise filter for better noise reduction
- Outputs individually isolated and individually fused (2A PTC)
- Individual output status LEDs
- Heavy-duty steel case with cover and cam lock
- Built-in short circuit and overheat protection

### Specifications:

Operating voltage	110/220 VAC (50/60 Hz)
Outputs	16
Total supply current	20A
Max. current per output	1.25A
Output fuse	2A PTC (Per-channel)
Output voltage	12VDC ±5%
Efficiency	80%
LED Indicators	Individual, per output, red indicates powered
Operating humidity	95% non-condensing
Operating temperature	32°~104° F (0°~40° C)
Dimensions	8"x9 <sup>3</sup> / <sub>16</sub> "x3 <sup>15</sup> / <sub>16</sub> " (204x250x100 mm)
Weight	6-lb (2.71kg)




**Low  
Noise**

**6kV  
Surge  
Protection**

**Individually  
Grounded  
& Isolated**

**Supports  
4K (8MP)  
CCTV**

### Output Isolation:

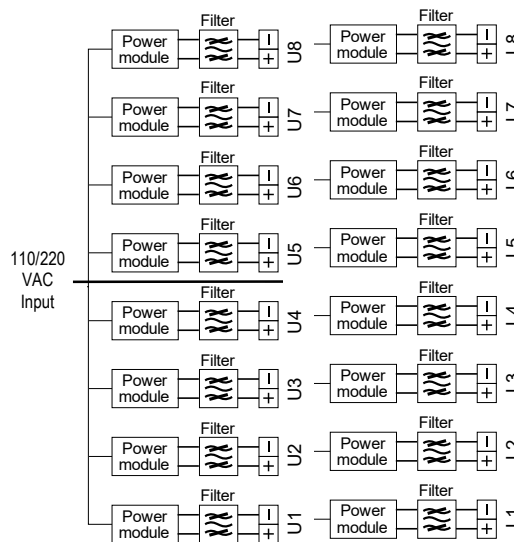

Each output is completely isolated and independently grounded, with integrated noise filtering.

Each output's voltage is also independently adjustable.

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PI\_PC-L1620-PQ\_221220.docx