JascoPro™ Series Wi-Fi In-wall Smart Dimmer
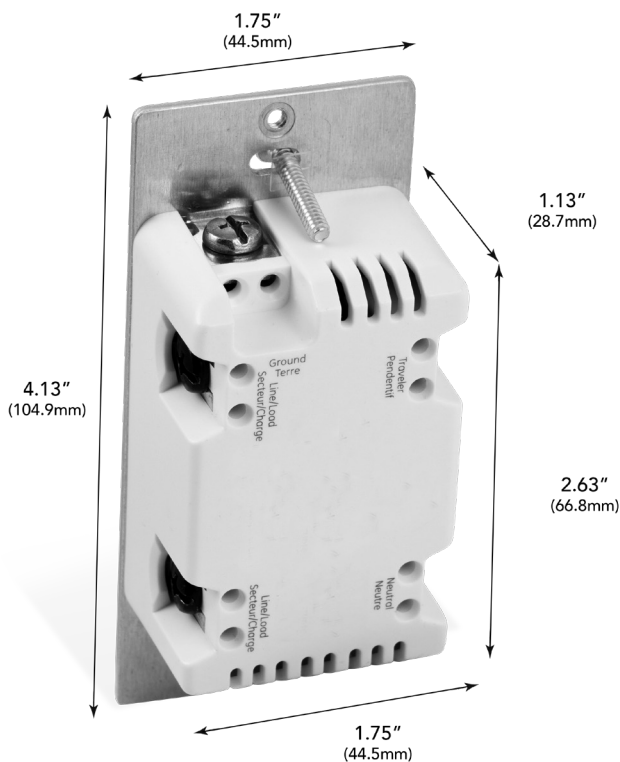
JASCO PRO™ SERIES

QUICKFIT™
SIMPLEWIRE™

Specifications

Power: 120VAC, 60Hz   **Signal Frequency:** 2.4GHz
Maximum Load: 600W Incandescent, 360 Dimmable CFL/LED
Range: Up to 100 feet from router
Operating Temperature: 32-104° F (0-40° C)
Warranty: 5-year limited product warranty

**Requires neutral wire. Switch must be mounted indoors**

Design Features

· QuickFit™ – Improved components reduce the housing depth by up to 20 percent compared to previous Wi-Fi models and eliminated the need for heat tabs

· SimpleWire™ – Auto line-load sensing terminals support fast installation by detecting line and load wires and configuring the dimmer accordingly. Dual ground ports, which are offset to avoid switch box mounting screws, support daisy-chaining in multi-switch setups

· Turn the connected device On/Off manually or adjust brightness levels with the JascoPro™ Series App

· May be used in single pole installation or with up to four Jasco model 46560 Add-on switches in 3 or 4-way connections, or can be connected with the existing 3-way switch.

· Works with all LED, CFL, halogen and incandescent bulbs

· Blue LED indicates automatic or manual paring mode status. Also indicates switch location in a dark room(with 4 adjustable settings)

· Can be included in multiple Groups, Scenes and automation

· Operates in either switch or dimmer modes

· Double-tap and triple-tap scene activation directly from device

· Set upper and lower brightness levels to eliminate bulb flicker

· Screw Terminal installation; requires wiring connections for Line (Hot), Load, Neutral, and Ground. Traveler wire required for multi pole installation

· Uses a standard decora wall plate (wall plate not included)

· Interchangeable Paddle switch: White & light almond paddle included in package

· LED status can be inverted manually changed to invert, always OFF and always ON
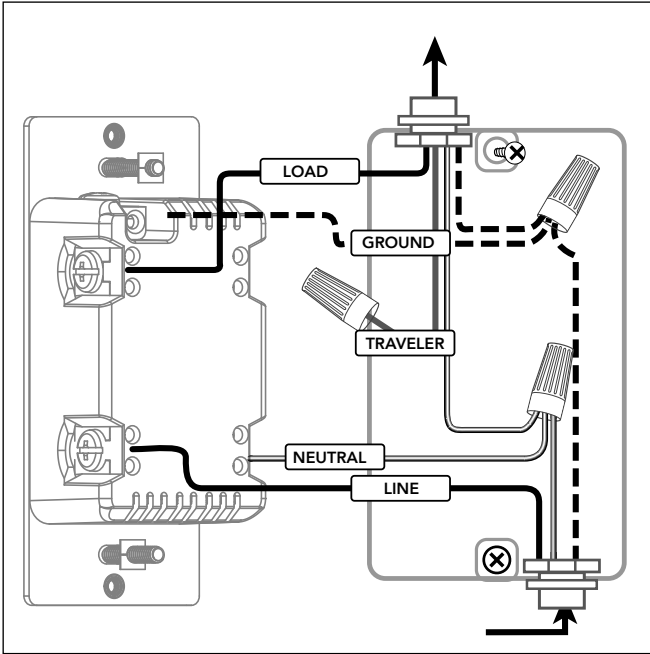
· Inline traveler circuit protection

Installation Recommendations:

· Insert wire into port and tighten screw. Do not wrap wire around screw
· Indoor use only
· Wallplates sold separately
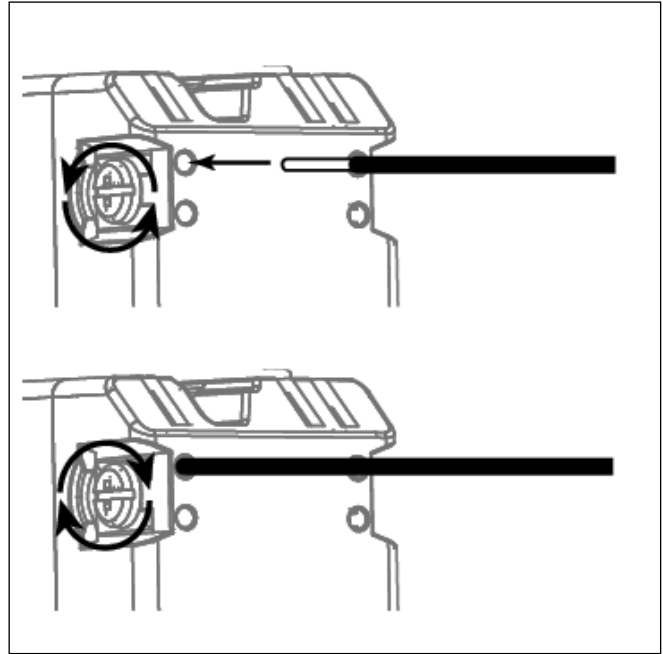· Trilingual Instruction manual – (English, French, Spanish)
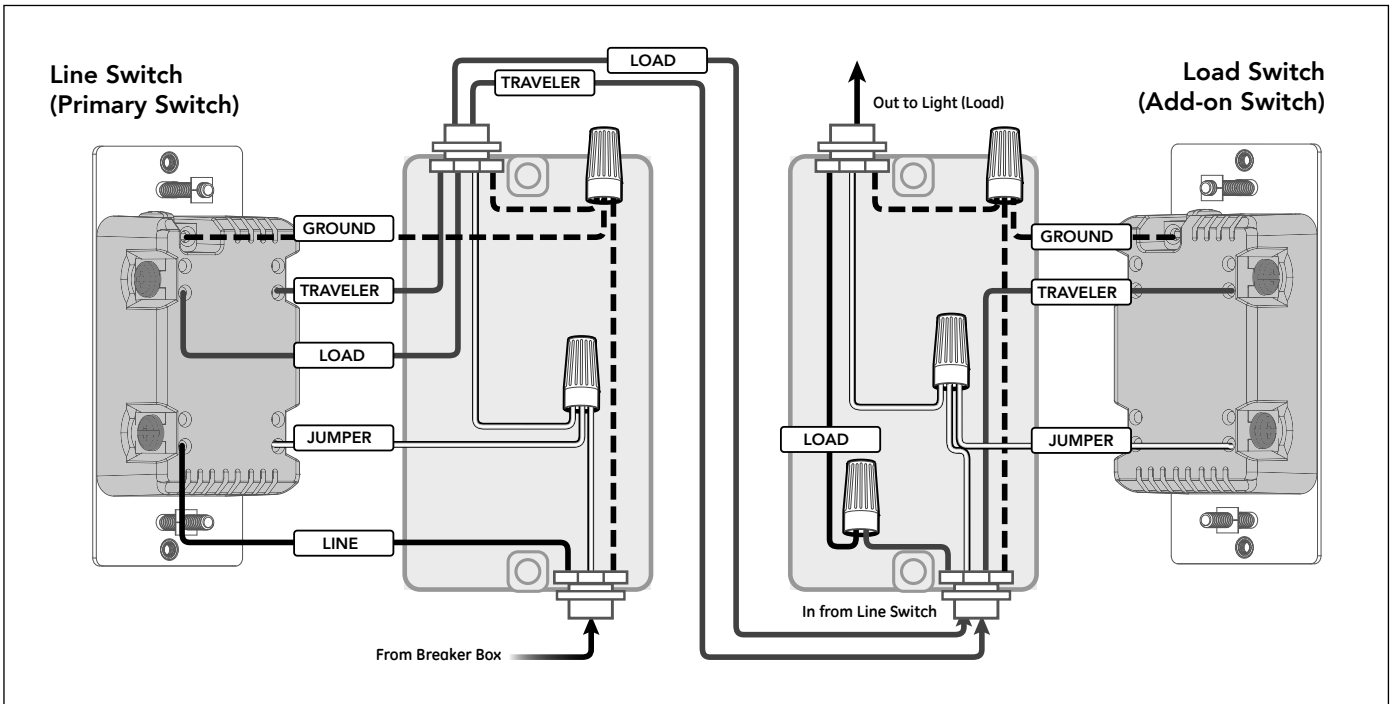
White/light almond paddles included

Dimensions:
1.75" (44.5mm)
1.13" (28.7mm)
4.13" (104.9mm)
2.63" (66.8mm)
1.75" (44.5mm)

Ground / Terre
Line/Load Secteur/Charge
Traveler / Pendentil
Line/Load Secteur/Charge
Neutral / Neutre

Single Location Wiring

LOAD
GROUND
TRAVELER
NEUTRAL
LINE

Space-Saving Screw Terminals

Multi-Location Wiring

Line Switch
(Primary Switch)

LOAD
TRAVELER
GROUND
TRAVELER
LOAD
JUMPER
LINE

From Breaker Box

Out to Light (Load)

Load Switch
(Add-on Switch)

GROUND
TRAVELER
LOAD
JUMPER

In from Line Switch

Certifications & Compliances

c(UL)us LISTED

FC FEDERAL COMMUNICATION COMMISSION U.S.A.

Compliances, specifications and availability are subject to change without notice

©Jasco 2022