

# INSTRUCTION/INSTALLATION SHEET

## GF TO ON-Q MODULE MOUNTING PLATE


IS-0310 REV. 0

### 1. Introduction

The GF to On-Q Module Mounting Plate (P/N 364819-01) is designed to easily mount two single-bay or one double-bay Greyfox module into an On-Q Home enclosure.

### 2. Description

The GF to On-Q Module Mounting Plate, (see *Figure 1*) is designed to be mounted in an On-Q Home enclosure, with two tabs on one end and two locking tabs (push-pins) on the other. Two single-bay Greyfox modules or one double bay Greyfox module is then attached to the plate with the module's four push-pins (one at each corner of the Greyfox module).

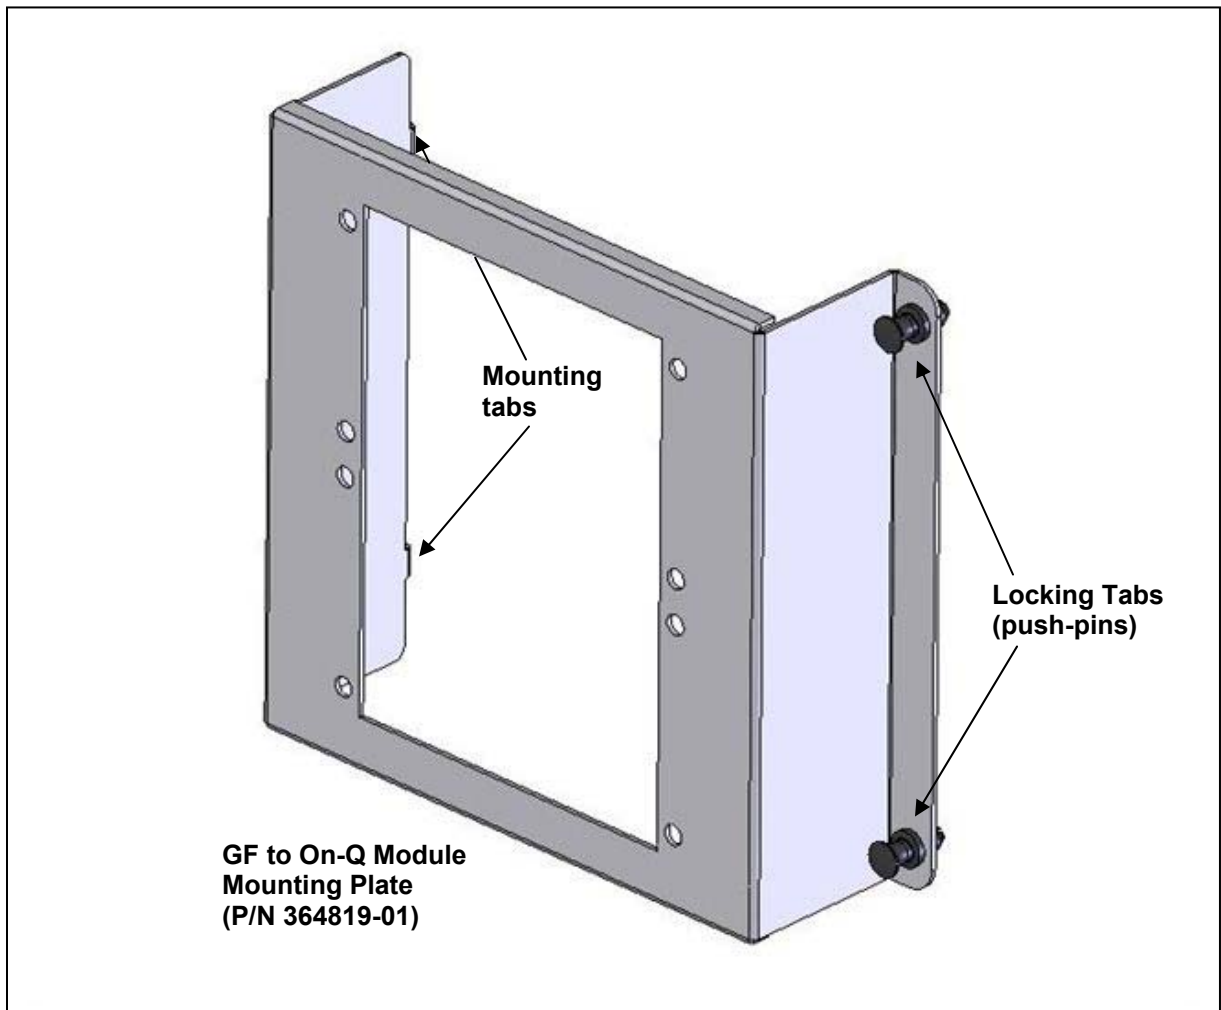

**Figure 1**

# INSTRUCTION/INSTALLATION SHEET

## GF TO ON-Q MODULE MOUNTING PLATE

IS-0310 REV. 0

### 3. Installation

The GF to On-Q Module Mounting Plate is typically installed during “trim-out” or as an upgrade for an existing installation.

- Place the Greyfox module/s on the mounting plate with the push-pins in each corner.
- Align two stationary tabs on the mounting plate with slots on the back of the enclosure (see *Figure 2*).
- Insert tabs by angling module away from the back of the enclosure and sliding forward (see *Figure 2*).
- Rotate the mounting plate and insert the built in locking tab (push-pins) on the mounting plate into the corresponding hole on the back of the enclosure, pushing in until it snaps into place (see *Figure 2*).
- Pull lightly on the mounting plate to assure it is properly locked in place.
- The CAT5e, coax, or power cables may be run behind the mounting plate if necessary for a cleaner installation.

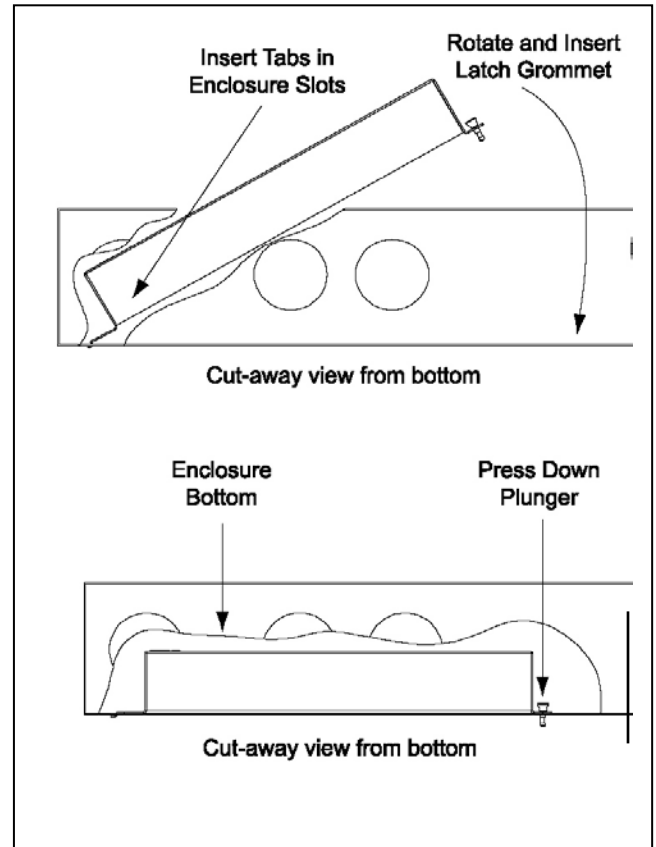


Figure 2