

# ABB Welcome™ M251021Px Row pushbutton module

M251021P3

M251021P4


## Row pushbutton module

Simple module is available in 3 and 4 row pushbuttons. The buttons can be configured for a single purpose i.e., call apartment, call guard unit, or to turn on the light. One 3 button module can be configured to call 6 apartments.

## Key features

- Nameplates can be extracted without dismantling the outdoor station.
- Backlight ensures clear visibility at night.
- Pushbuttons can be configured to call 2 addresses or functions.

Number	Function
1	Connector to previous module
2	Connector to next module

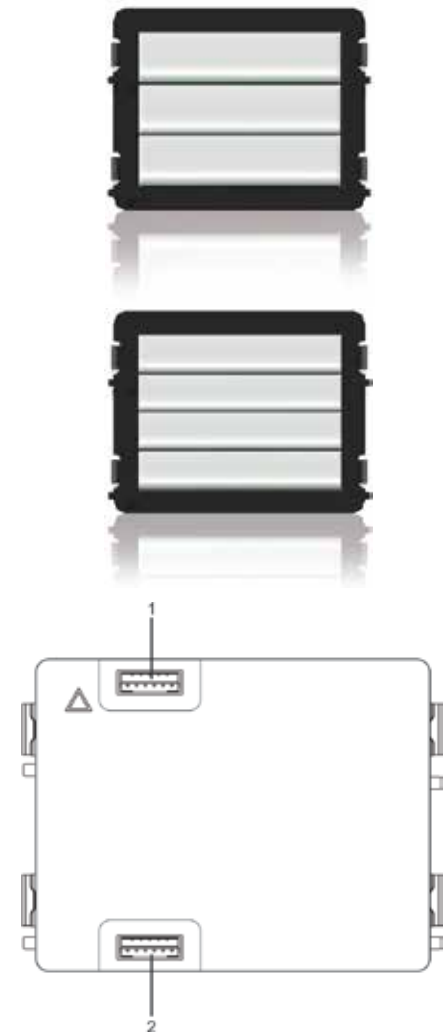

## Specifications

Operating temperature: -40 °F to + 158 °F

Ingress protection: IP54

Bus voltage: 20-30 VDC (From system controller or system component configured as local power supply through audio module)

Product dimensions: 2.83" x 3.82" x 0.98"

# Contact us

## **ABB**

Low Voltage Products  
8155 T&B Boulevard  
Memphis, TN 38125  
[www.abb.us/lowvoltage](http://www.abb.us/lowvoltage)

USA Technical Support: 888-862-3289  
Customer Service: 888-862-3290  
7:00 a.m. – 5:30 p.m., CST, Monday – Friday  
[techsupport@tnb.com](mailto:techsupport@tnb.com)