

Channel Vision Technology will repair or replace any defect in material or workmanship which occurs during normal use of this product with new or rebuilt parts, free of charge in the USA, for ten years from the date of original purchase. This is a no hassle warranty with no mail in warranty card needed. This warranty does not cover damages in shipment, failures caused by other products not supplied by Channel Vision Technology, or failures due to accident, misuse, abuse, acts of God, or alteration of the equipment. This warranty is extended only to the original purchaser, when purchased through an authorized reseller and a purchase receipt, invoice, or other proof of original purchase date will be required before warranty repairs are provided.


Mail in service can be obtained during the warranty period by calling (800) 840-0288 toll free. A Return Authorization number must be obtained in advance and can be marked on the outside of the shipping carton.

This warranty gives you specific legal rights and you may have other rights (which vary from state to state). If a problem with this product develops during or after the warranty period, please contact Channel Vision Technology, your dealer or any factory-authorized service center.



● CHANNEL VISION™
channelvision.com

234 Fischer Avenue, Costa Mesa, California 92626
(714)424-6500 • (800)840-0288 • (714)424-6510 fax

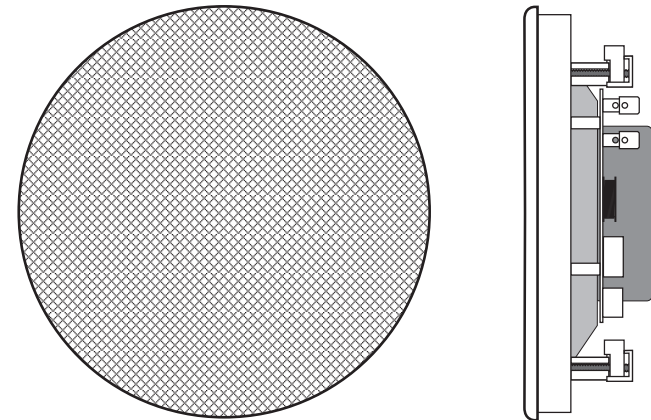

ID653 **6-1/2" Frameless 2-way** **Single Point Stereo In-Ceiling Speaker**


ARIA™
BY ● CHANNEL VISION™

Model ID653

Channel Vision's ARIA™ **ID653** 6-1/2" in-ceiling custom installation single point stereo speakers combine the full frequency audio experience of 2 separate audio speakers but in a single space-saving chasis. The ID653 is the right solution where space is limited but sound quality cannot be sacrificed. High quality materials ensure long life and great performance. High quality materials ensure long life and great performance. Gold speaker wire terminals not only provide better contact surface but also offer less resistance to signal transfer for a clearer sound.

Features:

- 6-1/2" High performance in-ceiling loudspeaker
- Gold-plated speaker terminals
- Woven Kevlar® woofers with butyl rubber surrounds
- Small perforated designer frameless grill
- Proven Mounting System

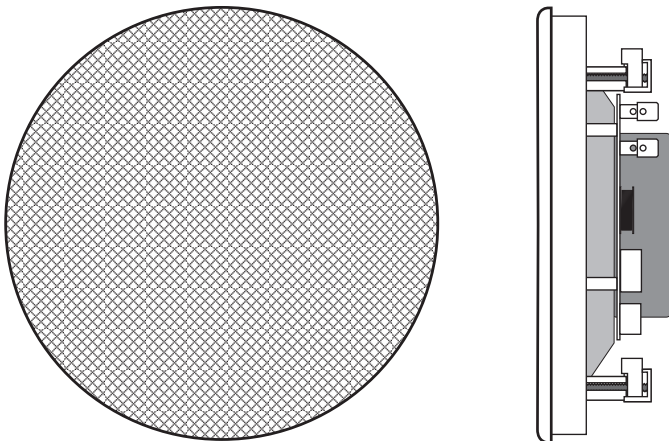

Installation:

- Use the provided template to mark and cut a 7-1/4" round hole in drywall away from ceiling joists.
- We recommend AWG 16 stranded wire or larger.
- Connect the wire to both the left and right channel terminals on the back of the speaker by depressing each spring terminal, inserting the wire into the hole, and releasing the terminal. Use care to observe the proper polarity (+ & -) for both channels and make sure that each wire connects to the same channel and polarity on the back of the amplifier.
- Install the ID653 in the hole. Tighten the mounting screws. The mounting "dogs ears" will rotate outward and grip the drywall. **DO NOT OVER TIGHTEN** the screws. A battery operated drill on a "low clutch" setting is recommended.
- To control the volume of the speaker locally, use an impedance matching volume control, such as the Channel Vision VC-302.

Specifications:

Frequency Range:	45Hz - 20kHz ± 3 dB
Sensitivity:	91dB 1 watt / 1 meter
Power Handling:	50W RMS, 100W Max (both channels)
Woofers:	6-1/2" Kevlar® w/ butyl rubber surround
Tweeters:	Dual (L+R) 3/4" dome tweeters
Impedance:	8 ohms nominal
Finish:	ABS plastic
Dimensions:	8-7/16" Round
	Hole Size: 7-1/4" Round x 3-5/16" Deep