

# Presence<sup>®</sup> Elite



## 15° Frameless Loudspeakers

### PE-620LCRSf

6-1/2" In-Ceiling / Wall LCRS Loudspeaker

#### Specifications

Frequency Response: 55Hz - 22kHz  $\pm$  3 dB

Power Handling: 45 watts nom. 90 max.

Sensitivity: 87dB 2.83 V / 1 meter

Impedance: 8 ohms nominal

Tweeter: 1" Pivoting silk dome tweeter


Cut-out dimensions: 8-5/8" Diameter x 4-3/16" Deep

Overall dimensions: 9-7/8" Diameter

*Sold and Shipped Individually*

#### Features:

- Woven glass fiber woofer with butyl rubber surround
- Super slim 3mm all-weather frameless grille
- Augmented dispersion design
- Ferro-fluid cooled tweeter
- Load balancing toggle mounting system
- High quality multi-order crossover

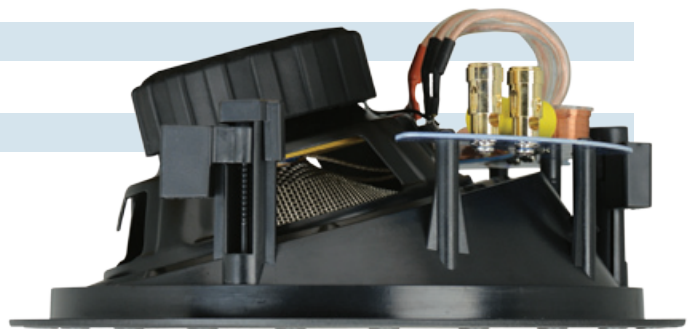

Optional Pre-Construction  
Brackets & Vapor Domes



Optional Square Frameless Grilles

MGS-8f



Rev. C

**OEM SYSTEMS COMPANY**  
(775) 355-0405 ♦ (800) 291-0561 FAX  
www.oemsystems.com ♦ info@oemsystems.com