Outdoor Stand-Alone / Wiegand Keypad with Proximity Reader

SK-2612-SPQ *Keypad and Proximity Card Reader*

Features:

- 1,000 Users (up to 998 users and 2 duress users)
- User code length 4~6 digits
- 9~18 VDC Operation, low current draw – 105mA max.
- Form C relay output – 2A@12VDC
- Adjustable output time – 0.5~99s, or toggle
- Built-in tamper alarm and external alarm (duress) output
- Backlit keypad and multicolor status LED
- EM 125kHz*
- Easy transfer of users to additional devices using Wiegand output
- All features programmed directly on the keypad: No need for an external programmer
- Egress input lets users exit the premises without a code/card
- Can serve as either Wiegand reader or controller, both output and input are selectable 26~37 bits
- 2-Door interlock function
- Extreme cold tolerance to -40° F (-40° C)
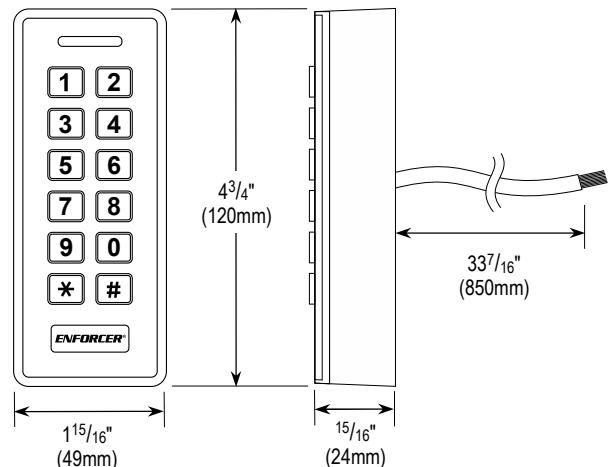- Epoxy-filled black ABS plastic housing – Weather-resistant IP66

*Proximity cards or key fobs available from SECO-LARM

9~18 VDC | **IP66** | **Stand-Alone or Wiegand** | **1,000 Users**

Specifications:

Operating voltage		9~18 VDC
Current draw	Standby	40mA@12VDC
	Active	105mA@12VDC (max.)
Outputs	Form C	NO/NC/COM, 2A@12VDC
	Alarm	Transistor ground, 2.5A@12VDC,
	Wiegand	26~37 bits, PIN output bits – 4, 8, or 10
Inputs	Egress	N.O. Ground
	Door Sensor	N.C. Ground
	Wiegand	26~37 bits, PIN output bits – 4, 8, or 10
Card type		EM 125kHz
Enclosure / IP Rating		Epoxy-filled black ABS plastic, IP66
Operating temperature		-40°~140° F (-40°~60° C)
Dimensions		$1^{15}/_{16}$"x$4^{3}/_{4}$"x$^{15}/_{16}$" (49x120x24 mm)
Weight		5.8-oz (165g)

Dimensions:

$4^{3}/_{4}$" (120mm)

$33^{7}/_{16}$" (850mm)

$1^{15}/_{16}$" (49mm)

$^{15}/_{16}$" (24mm)

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326
Website: www.seco-larm.com **Email:** sales@seco-larm.com

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI® E®

PI_SK-2612-SPQ_200219.docx