



Gigabit Network Switches

P32S36GM

36-Port Managed Gigabit Switch with 32-ports PoE and 4xSFP Uplink



Features

- Layer-2 managed switch (supporting PoE function)
- 32 x 10/100/1000Mbps adaptive RJ45 ports and 4 x SFP Gigabit optical ports. Two SFP to RJ45 adapters included
- Each RJ45 port supports MDI/MDIX auto flip and wire-speed forwarding functions.
- Ports 1-32 support Power over Ethernet and follows the IEEE802.3af/at standard.
- Can automatically detect and identify a power-receiving device and supply power to it through a network cable.
- Uses store-and-forward mode, combined with QoS technology, to ensure that the bandwidth is effectively allocated to each port.
- Provides stable and reliable power and data transmission for high-power AP, network cameras, PTZ network dome cameras, PoE lighting and other security monitoring equipment.

Ports

Fixed Ports	32*10/100/1000 Base-T + Uplink 4*1000 Base-X
Management Port	Supports console
LED Indicators	PWR, SYS, Link/ACT LED

Cable Type & Transmission Distance

Twisted-Pair	Non PoE: 0-100m (CAT5e, CAT6) PoE (1000Mbps): 0-100m (CAT5e, CAT6) PoE (10Mbps): 0-250m (CAT5e, CAT6)
Mono-mode Optical Fiber	20/40/60/80/100KM
Multi-mode Optical Fiber	550m

Network Topology

Ring Topology	✓
Star Topology	✓
Bus Topology	✓
Tree Topology	✓
Hybrid Topology	✓

Electrical Specifications

Input Voltage	100-220V/AC 50/60Hz 1A-5A
Total Power Consumption	Non PoE full load < 40W PoE full load < 440W

PoE Support

PoE Ports	1-32
PoE Protocol	802.3af, 802.3at
Pin Assignment	1,2+;3,6-
PoE Management	Supports

Layer 2 Switching

Switching Capacity	72G
Packet Forwarding Rate	53.568 Mpps
MAC Address Table	16K
Buffer	12M
Forwarding Delay	<10us
MDX/MIDX	✓
Flow Control	✓
VLAN	Supports 4K
Jumbo Frame	Supports 10Kbytes
Spanning Tree	Supports STP/RSTP/MSTP
Ring Protocol	Supports ERPS
Link Aggregation	Supports 12 pairs
Multicast	Supports IGMP Snooping
Port Mirroring	✓
Storm Control	✓
Interface Counters	✓
QINQ	✓
802.1X	✓
Port Isolation	✓
Rmon	✓
NTP Client	✓
DHCP Client	✓
DHCP Snooping	✓
Ping/Tracert Test	✓
Fiber Transceivers DDM	✓

NDA A
COMPLIANT

*Products are in compliance with NDAA Section 889 Part B Guidelines



IP Gigabit Network Switches

P32S36GM

36-Port Managed Gigabit Switch
with 32-ports PoE and 4xSFP Uplink



Convergence

ACL	Supports ACL 500 Supports IP standard ACL Supports MAC extend ACL Supports IP extend ACL
QoS	Supports QoS re-marking, priority mapping Supports SP, WRR queue scheduling Supports entry and exit speed limit Supports flow-based QoS

PoE Support

CLI	✓
Console	✓
Telnet/SSH	✓
WEB Management	✓
Management IP	Supports IPV4/IPV6
SNMP	Supports SNMPv1/v2c/v3
User Management	✓
System Log	✓
Configuration File Download/Upload	✓
Upgrade Firmware	✓

Environment

Operating Temperature	-13°F-140°F (-25°C-+60°C)
Storage Temperature	-40°F-158°F (-40°C-+70°C)
Relative Humidity	5%-95% non-condensing
Thermal Methods	PoE: forced cooling by fan
MTBF	100,000h
PoE Management	✓

Layer 2 Switching

Switching Capacity	72G
Packet Forwarding Rate	53.568 Mpps
MAC Address Table	16K
VLAN	Supports 4K
Buffer	12M
Forwarding Delay	<10us
MDX/MIDX	✓
Flow Control	✓
Jumbo Frame	Supports 10Kbytes
Spanning Tree	Supports STP/RSTP/MSTP
Ring Protocol	Supports ERPS
Link Aggregation	Supports 12 pairs
Multicast	Supports IGMP Snooping

Mechanical Dimensions

Product Size	17.25" x 11.75" x 1.9" (440*290*44mm)
Installation Method	1U Rack Mount, Rack ears included
Weight	8.8lbs (4.0kg)


EMC & Ingress Protection

Surge Protection of Power	Common mode 6KV, differential mode 6KV
Surge Protection of Ethernet Port	Common mode 4KV
ESD	Contact 8K, air 15K
Free Fall	0.5m

EMC & Ingress Protection

Included Accessories	Power cord, User manual, Rack ears, 2pcs Copper Transceiver modules
----------------------	---

1U chassis, Rack ears included

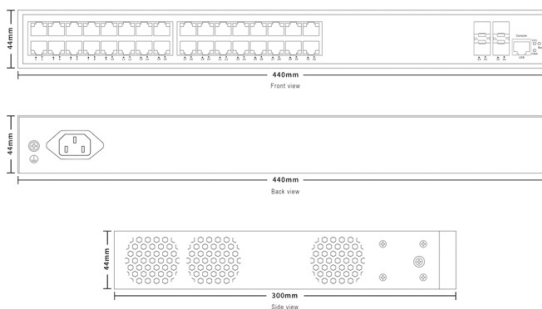

Optional Accessories



UTP Audio
Send Audio up to
1 mile over CAT5E

Made in China

NDAA
COMPLIANT

*Products are in compliance with NDA Section 889 Part B Guidelines

