

SCP PART#: 12/2OFC-HD-XX

Description:


Indoor/Outdoor Pro Grade Speaker Cable - 2C/12 AWG
 65 Strand Oxygen Free Copper, Direct Bury/Sun Res
 HD PVC JKT - 500 FT REEL IN BOX

Regulatory

UL :UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
 EU RoHS 2011/65/EU Compliant

Application:

Speaker Cable

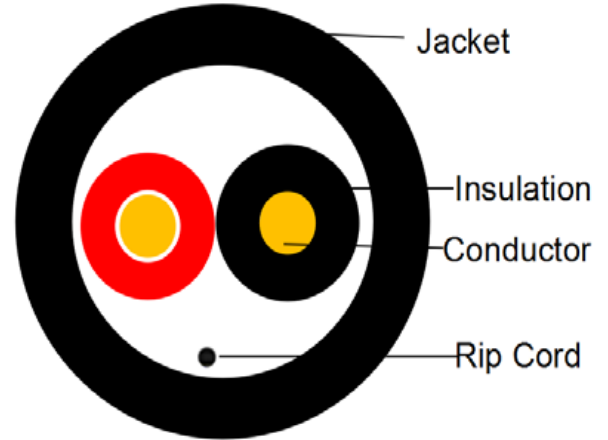

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	12AWG X 2C(3.32mm ²)
	Construction	65/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	3.20mm +/-0.05mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	8.3mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request

Electrical & Physical Characteristics:

Operating Temperature Range		- 20°C + 70°C	
Conductor Resistance		Max 5.8 ohm/km at 20°C	
Insulation Resistance		Min 50M Ω*km at 20°C	
Dielectric Strength		Min AC1.5KV	
Insulation	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)

Marking:

STRUCTURED CABLE PRODUCTS --- 12/2OFC-HD E198137 SCP3 (UL) CL3 C(UL) CMR 2C 12AWG
 65 STRAND OXYGEN FREE COPPER INDOOR/OUTDOOR-SUN RES FT4 75C CE RoHS
 ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Wight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
17.00	270X100X300	Spool	27
	310X340X350	500ft/Reel in box	