


Remote Chime, Model SC546A

INSTALLATION AND OPERATING INSTRUCTIONS

1. Set the Housecode dial on the SC546A to the same letter as your X10 Controller (TM751, MS16A, MC10A, etc.).
2. Set the Unit Code dial on the SC546A to any unused number between 1 & 16. If you are using it with a Motion Sensor, set it to the same Housecode and Unit Code as your Motion Sensor (MS16A) and the same Housecode as your Transceiver (TM751).
3. Plug the SC546A chime into any unused AC outlet (not one that is controlled by a wall switch, in case the switch accidentally gets turned off).
4. To test the SC546A, press the number button (on any X10 Controller) corresponding to the Unit Code you set on the SC546A. Or walk past a Motion Sensor. The Motion Sensor sends a signal to the TM751 which retransmits it over your house wiring to the SC546A. The SC546A then chimes.

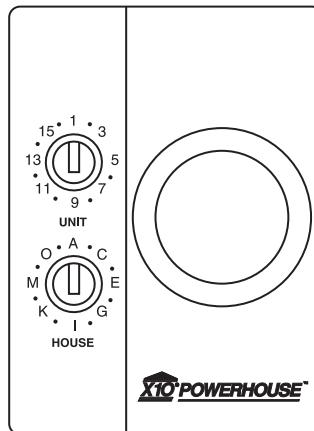

For help or more information on setup, please visit: www.x10.com/support

trim

Check Out our Web site at:

<http://www.x10.com>

**For more information on X10 products and
special promotional offers.**

X10 Wireless Technology, Inc. Limited 90 Day Warranty

X10.com, a division of X10 Wireless Technology, Inc. (X10) warrants X10 products to be free from defective material and workmanship for a period of 90 days from the original date of purchase at retail. X10 agrees to repair or replace, at its sole discretion, a defective X10 product if returned to X10 within the warranty period and with proof of purchase.

If service is required under this warranty:

1. Call 1-800-675-3044 or e-mail sales@x10.com or visit www.x10.com, to obtain a Return Merchandise Authorization (RMA) number.
2. Return the defective unit postage prepaid to X10 (see address on back).
3. Enclose a check for \$4.00 to cover postage and handling.
4. Enclose a dated proof of purchase.
5. X10 is not responsible for shipping damage. Units to be returned should be packed carefully.

Please visit www.x10.com/warranty
to complete your on-line warranty registration. Thank you.

X10 Wireless Technology, Inc.

400 Forge Way, Suite 409-412,

Rockaway, NJ 07866

RMA#

Tear off and keep the portion to the right (setup instructions are on the other side of it) and keep for future use.

**Call 1-800-675-3044 or e-mail sales@x10.com
or visit www.x10.com, to obtain a Return Merchandise Authorization (RMA) number.**

Write your RMA number above. Tear off and tape this label to the outside of the package and mail it (postage prepaid).

Trim

Mini Timer MT13A

A Controller, Timer and Alarm Clock all in one! Programs up to eight X10 Modules to go on and off at specific times, up to a total of 64 timed events. Controls eight modules instantly. Dims lights too.

Maxi Controller SC503

Lets you control up to 16 X10 Modules at the touch of a button from anywhere in the house. Dims lights too!

Mini Controller MC10A

Lets you control up to eight X10 Modules at the touch of a button from anywhere in the house. Dims lights too!

2-Way Home Control Interface CM15A

Set up from a PC to control up to 256 X10 Modules. ActiveHome Pro software download & USB cable included.

Thermostat Set-Back TH2807

Automatically sets-back your central heating/air conditioning. Mounts on the wall under your existing thermostat and plugs into an Appliance Module.

Wireless Remote Control System RC5000

Lets you control 16 X10 modules from inside or outside your home. Can also dim and brighten Lamp Modules and Wall Switch Modules. Works with the HR12A PalmPad Remote and X10 RF Wall Switches (SS13A, SS15A).

Lamp Module LM465

Can be Dimmed and Brightened from any X10 Controller. Responds to "All lights on". Rated for 300 W. Incandescent only.

2-Way version LM14A.

SocketRocket LM15A

Screws in to an existing light fixture. Controls up to 150W, incandescent only.

Appliance Module - AM486/AM466

Two pin polarized (AM486) or 3 pin grounded (AM466). For controlling an air conditioner, TV, stereo, etc. anywhere in the home. Rated 15A for heaters, coffee pots etc.; 1/3 H.P. for motors; 400W for TVs; 500W for lamps. *2-Way versions available AM14A (2 pin), AM15A (3 pin).*

Wall Switch Module WS467

For controlling important indoor and outdoor security lights. Replaces your existing wall switch and installs like a regular dimmer. Dimmed/brightened from any X10 Controller. Rated 500W incandescent only.

3 - Way Wall Switch Module WS4777

For controlling a light which is controlled by two switches. Same features as WS467.

Split Receptacle Module SR227

Replaces existing wall outlet. The top outlet functions like an Appliance Module, the bottom one is a regular outlet. Rated 15A.

Universal Module UM506

Isolated contact relay and beeper. Can be set for momentary or continuous operation. Not compatible with X10 security systems.

Trim