



YH Collection VALDOSTA




Standard Specifications:

Door Prep	Cross bore: 2-1/8" Edge Bore: 1" Latch face: 1" x 2-1/4" RC
Door Thickness	1-3/8" to 1-3/4" doors
Latch Std product	Tubular 2-3/8" or 2-3/4" RC/SC adjustable Tubular Drive-in latch available
Strike	1-3/4" x 2-1/4" Radius Corner Full lip strike
Door Handing	Reversible Levers
Cylinder	6 Pin KW-1 Compatible Optional SC-1 or Yale Para available
Keying	KA3 std; other options available


Features

- ANSI 156.2 Grade 2
- ADA compliant
- Non-handed design
- Hidden chassis screws
- Powder coat finish
- Std latch/strike screw is combination wood/metal screw

Dimensions:

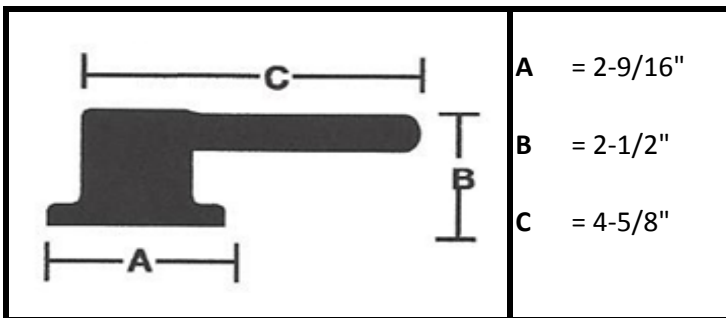

Strike Options: (upcharge may apply)

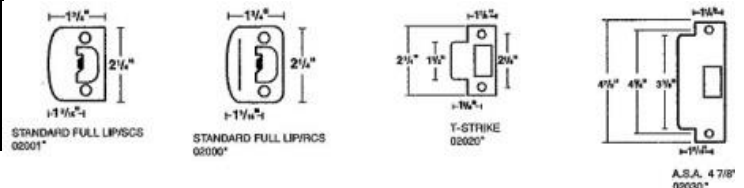

Model	Function	CTN QTY	ItemNumber		Available finishes: 10BP(K) 619(N) 626(7)
			US15/619 (N)	US26/625 (6)	
VL81	Dummy	12	D553VN	D553V6	
VL71	Entry	12	D540VN01	D540V601	
VL21	Privacy	12	D520VN01	D520V601	
VL11	Passage	12	D510VN01	D510V601	