

IntelliTilt

Automated Window Blind System
Elektro Solutions LLC

Thank you for purchasing the **IntelliTilt Automated Window Blind System!** You'll be enjoying hassle-free window operation in no time.

1.0 What's in the box:

- 1 x IntelliTilt Control Module
- 1 x IntelliTilt Motor Module
- 1 x Optional hook attachment
- 1 x Suction Cup Mount

2.0 Picking a Location

- 1) The IntelliTilt performs better the more direct exposure to sunlight it receives, windows that are shaded may experience difficulty staying charged.
- 2) Only window blinds with a detachable wand will work properly with the IntelliTilt.
- 3) Some blinds with excessively large hooks/loops might not work properly.

3.0 Quick Setup:

- 1) Detach the tilt-wand currently installed on your window blinds.
- 2) Attach the IntelliTilt Motor Module to the window blind hook or loop.
- 3) Remove the adhesive backing on the IntelliTilt Motor Module and firmly press to the window blind headrail.
- 4) Place the provided suction cup onto a preferred installation location on your window.
- 5) Hang the IntelliTilt Control Module onto the suction cup hook.
- 6) Plug the Motor Module into the Control Module.
- 7) Flip the power switch to the "On" position.
- 8) Congratulations! Your IntelliTilt Automated Window Blind System is now ready for years of worry free use.

4.0 Calibration and Customization:

The IntelliTilt Automated Window Blind System comes from the factory with default settings that should meet the majority of scenarios. If your requirements differ from the factory defaults, here is how to customize your installation.

4.1 Setting the "Closed" and "Open position:

- 1) Press and hold the "Open" button until the window is in the desired position.
- 2) While holding the "Set" button, press and hold the "Close" button until the window is in a typical "Closed" position. Release both buttons.
- 3) While the blinds are in the "Closed" position, press and hold the "Set" and "Open" buttons until the window blinds are in the desired "Open" position. Release both buttons.

4.2 Setting the "Morning Light Level"

- When the sunlight level is at a preferred "Morning Light Level", press the "Set" button once and release. The LED indicator should blink once to indicate the setting was saved.

4.3 Setting the "Evening Light Level"

- When the sunlight level is at a preferred "Evening Light Level", press the "Set" button twice. The LED indicator should blink twice to indicate the setting was saved.

5.0 Operation

5.1 Manual Open to "Open" position

- Press the "Open" button once.

5.2 Manual Close to "Closed" position

- Press the "Close" button once.

5.3 Manual Open to any position

- Press and hold the "Open" button to the desired position.

5.4 Manual Close to any position

- Press and hold the "Close" button to the desired position.

6.0 Tips/Frequently Asked Questions

- Try not to set the "Morning Light Level" near the brightest part of the day.
- Try not to set the "Evening Light Level" at the darkest part of the day.
- Place in a window that has exposure to sunlight.
- When setting the "Closed" position, hold the button a few


seconds past what you would typically consider “Closed”. This lets the Control Module make a more confident decision on where the proper “Closed” position is.

7.0 Factory Reset

- To return to factory defaults, press and hold “Set” for fifteen (15) seconds until you see the LED indicator blink three times.

8.0 (Optional) Hook Attachment

- Most window blinds come with hooks that easily attach to the Motor Module. Some blinds have a loop that more easily attaches to a hook. Packaged with your IntelliTilt is a hook that can be screwed into the top of the Motor Module for a better connection.

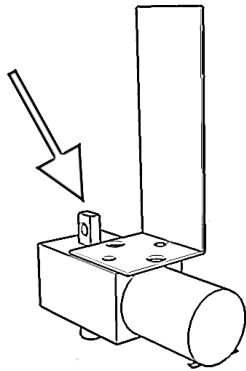


9.0 Support

- To obtain installation support for the IntelliTilt Automated Window Blind System email support@IntelliTilt.com

10.0 Compliance

- The INTELLITILT is fully compliant with ROHS and WEEE regulations. Do not throw away the INTELLITILT in the waste. Contact Elektro Solutions LLC at info@IntelliTilt.com for proper disposal.

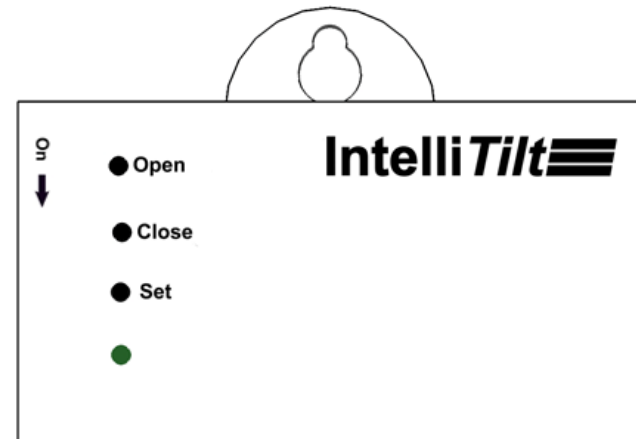


ELEKTRO SOLUTIONS LLC

INFO@INTELLITILT.COM

WWW.INTELLITILT.COM

Designed in the USA. Manufactured in China.

Lead Free

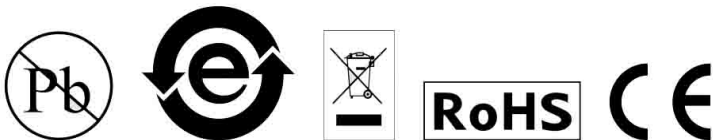

© 2011 Elektro Solutions LLC, Printed in the USA. All Right Reserved.
Printed on recycled paper.

