
HD-TVI 1080p 2MP Intense IR Dome Camera Wall/Ceiling Mount, UTC, 2BNC out for TVI & CVBS, Dual voltage



HT5940TM – 2.8~12mm motorized zoom focus lens, dark gray housing

200 New Highway, Amityville, NY 11701 800-645-5516 / www.specotech.com

DIMENSIONS

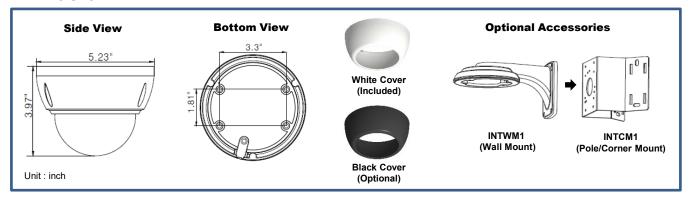



FEATURES

- Full HD resolution over coax (HD-TVI)
- Supports up to Full HD 1080p @ 30fps
- True WDR operation
- Intense IR function no saturation, IR intensity adapts to subject to provide vivid image
- · Built-in heater and anti-fog glass reduces condensation
- 3-axis for wall and ceiling mounting
- Chameleon Cover[™]: snaps on and can be painted to match any décor!*
- Full OSD and Zoom / Focus control through on-board and UTC
- · Additional 960H analog output
- Signal distance up to 1600 feet*
- Vandal / tamper resistant
- IP67 compliant, weather resistant
- 12VDC & 24VAC dual voltage operation
- 5 year warranty

SPECIFICATIONS

OSD MENU TREE

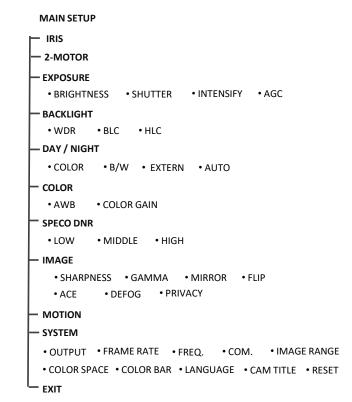



HD-TVI 1080p 2MP Intense IR Dome Camera Wall/Ceiling Mount, UTC, 2BNC out for TVI & CVBS, Dual voltage



200 New Highway, Amityville, NY 11701 800-645-5516 / www.specotech.com

HT5940TM - 2.8~12mm motorized zoom focus lens, dark gray housing

OSD MENU Details

IRIS: 'ALC' as a default value

2-MOTOR: AF Mode, Scanning, OnepushAF, Sync TDN, Initial

EXPOSURE: adjusts exposure settings.

BRIGHTNESS: Adjusts image brightness. (0~20)

SHUTTER: Outdoor / Indoor / Deblur

INTENSIFY: Sets the desired multiple of the digital exposure length.

AGC(Auto Gain Control): Adjusts the AGC level. (0~10)

BACKLIGHT: Adjusts backlight options.

WDR: WDR illuminates darker areas of an image while retaining the same light level for brighter areas to even out the overall brightness of images with high contrast between bright and dark area

- Adjusts the WDR Weight (LOW/MIDDLE/HIGH)

* CVBS out cannot adjust this function.

BLC: Produces a clearer image of an object darkened by strong backlighting.

- H-POS: Adjusts the horizontal position(0~20)
- V-POS: Adjusts the Vertical position(0~20)
- H-SIZE: Adjusts the horizontal block size (0~20)
- V-SIZE: Adjusts the vertical block size (0~20)

HLC: Uses to contain extremely bright areas such as from car headlight, the light can be masked out much of the on-screen details.

DAY / NIGHT : Adjust Day / Night options.

COLOR: Always Color mode, Default value for these cameras B/W: Always B/W mode.

- ANTI-SAT. : Adjusts the Anti Saturation level (0~20)

EXT: This mode allows you to apply a desired filter to external signals.

- ANTI-SAT.: Adjusts the Anti Saturation level (0~20)
- EXTERN S/W : Selected at manufacturer side
- D \rightarrow N LEVEL (0~20) : Selected at manufacturer side
- N → D LEVEL (0~20): Selected at manufacturer side
- DELAY: Adjusts the changing delay time (LOW/MIDDLE/HIGH)

AUTO: this mode is not available for IR camera

COLOR: Adjusts white balancing options.

AWB: it goes to optimized color level automatically. COLOR GAIN: Sets the desired Color Gain value (0~20)

SPECO DNR: Uses to reduce the background noise in a low luminance environment with 2D + 3D filtering system.

IMAGE: Adjusts various image options.

SHARPNESS: Adjusts sharpness level. Increasing this value, the picture outline becomes stronger and clear. (0~10)

GAMMA: Sets the desired Gamma value. (0.45 ~ 0.75)

MIRROR: Change the video direction horizontally.

FLIP: Change the video direction perpendicularly.

ACE (D-WDR): Uses a digital wide dynamic range to balance dark and over saturated areas within the image.

DEFOG: Activated this mode when the video or the weather is foggy.

PRIVACY: Used to hide regions of the image.

MOTION: Adjust motion detection settings.

DET WINDOW DET TONE MDRECT FILL SENSITIVITY: Sets the desired of "Motion" (0~20) MOTION OSD **TEXT ALARM** SIGNAL OUT

SYSTEM: Adjusts various camera system options.

MAIN OUTPUT ANALOG OUTO

ANALOG OUTO TVI

Y GAIN

CB GAIN

CR GAIN

POSITION

BURST FREQ

BURST GAIN

B&W

UCC SELECT

720EX

FRAME RATE: 1080P 30 / 720P 60

FREQ 60Hz

COM.

IMAGE RANGE

COLOR SPACE

COLOR BAR: Manufacturer's option LANGUAGE: Sets the desired OSD language

CAM TITLE

RESET: Press with long to reset all settings to factory defaults.



LIMITED WARRANTY - VIDEO PRODUCTS

THIS WARRANT I IS WALLD ONLY ON PRODUCTS PURCHASED AND USED IN THE UNITED STATES OF AMERICA AND CANADA. THIS WARRANTY APPLIES ONLY TO THE ORIGINAL USER.

SUBJECT TO CONDITIONS AND EXCLUSIONS FOUND BELOW, THIS PRODUCT IS WARRANTED AGAINST MANUFACTURING DEFECTS IN MATERIAL AND WORKMANSHIP FOR THE FOLLOWING PERIOD FOR PARTS AND LABOR:

SPECO TECHNOLOGIES CAMERAS 5 YEARS	DVRs5 YEARS
SPECO TECHNOLOGIES IP CAMERAS 5 YEARS	NVRs5 YEARS
SPECO PTZ1 YEAR	BALANCE OF
SPECO TECHNOLOGIES MONITORS 1 YEAR	SPECO TECHNOLOGIES LINE1 YEAR
IR LEDS 90 DAYS	

SPECO TECHNOLOGIES WILL REPAIR OR REPLACE (AT OUR DISCRETION) ANY PARTS FOUND TO BE DEFECTIVE FOR THE WARRANTY PERIOD SPECIFIED. WE WILL PROVIDE A REPLACEMENT FOR ANY DEFECTIVE PART.

CONDITIONS

- YOU MUST OBTAIN A RETURN AUTHORIZATION (RA) NUMBER FOR ANY MERCHANDISE BEING RETURNED TO SPECO TECHNOLOGIES, WHETHER FOR RETURN/EXCHANGE OR REPAIR, WHETHER IN OR OUT OF WARRANTY.
- 2. THIS WARRANTY WILL BE HONORED ONLY UPON PRESENTATION OF THE ORIGINAL DATED BILL OF SALE OR SALES SLIP.
- 3. TRANSPORTATION OF THE PRODUCT TO OUR SERVICE DEPARTMENT IS THE RESPONSIBILITY OF THE USER. REPAIRED OR REPLACED PRODUCT WILL BE RETURNED PREPAID DURING THE WARRANTY PERIOD.
- PRODUCT WILL BE RETURNED PREPAID DURING THE WARRANTY PERIOD.

 SPECO TECHNOLOGIES DOES NOT AUTHORIZE ANY INTERNET OR NAIL ORDER PRODUCT SALES. IF A SPECO TECHNOLOGIES PRODUCT IS PURCHASED FROM AN UNAUTHORIZED DISTRIBUTOR OR OTHER SOURCE. INCLUDING RETAILERS. MAIL ORDER SELLERS AND ONLINE SELLERS IT WILL NOT BE HONDRED OR SERVICED UNDER THE EXISTING SPECO TECHNOLOGIES WARRANTY POLAY SPECO TECHNOLOGIES PRODUCT PURCHASED FROM THESE ONLINE MERCHANTS WILL VOID THE APPLICABLE WARRANTY AND IS INBLIGIBLE FOR TECHNOLOGIES AUTHORIZED AUTHORIZED DEALERS. VISIT: WWW.specotech.com/unauthorized.

- THIS WARRANTY SHALL NOT COVER ADJUSTMENT OF CUSTOMER OPERATED CONTROLS AS EXPLAINED IN THE APPROPRIATE MODEL'S INSTRUCTION MANUAL OR PRODUCTS WHICH HAVE BEEN ALTERED, ABUSED, OR HAVE MISSING OR ALTERED SERIAL NUMBERS.
- 2. THIS WARRANTY SHALL NOT APPLY TO UNCRATING, SETUP, INSTALLATION, OR THE REMOVAL AND REINSTALLATION OF PRODUCTS AFTER REPAIR.

AT IER NEARANTY SHALL NOT APPLY TO REPAIRS OR REPLACEMENTS NECESSITATED BY ANY CAUSE BEYOND THE RESULT OF MANUFACTURE INCLUDING, BUT NOT LIMITED TO, ANY MALFUNCTION, DEFECTS OR FAILURE CAUSED BY OR RESULTING RESULTING FROM UNAUTHORIZED SERVICE OR PARTS, IMPROPER MAINTENANCE, MODIFICATION OR REPAIR BY THE USER, ABUSE, MISUSE, NEGLECT, ACCIDENT, FIRE, FLOOD, OR OTHER ACTS OF NATURE, INCORRECT LINE VOLTAGE, DAMAGE OR IMAGE BURNS TO TELEVISION PICTURE TUBES CAUSED BY OR ATTRIBUTABLE TO THE USE OF ANY ACCESSORY, ELECTRONICS GAME OR DEVICE, OR DAMAGE CAUSED TO IMAGE PICKUP DEVICES BY EXCESSIVE LIGHT.

THE FOREGOING IS IN LIEU OF ALL OTHER EXPRESSED WARRANTIES AND WE DO NOT AUTHORIZE ANY PARTY TO ASSUME FOR US ANY OTHER OBLIGATION OR LIABILITY. IN NO EVENT SHALL WE BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF THIS PRODUCT, OR FOR ANY DELAY IN THE USE OF THIS PRODUCT DUE TO CAUSES BEYOND OUR CONTROL. SOME STATES DO NOT ALLOW LIMITATIONS OF HOW LONG AN IMPLIED WARRANTY LASTS ANDOR DO NOT ALLOW THE SECULISION OR LIMITATION OF CONSCIDENTIAL DAMAGES. THE ABOVE LIMITATIONS ON IMPLIED WARRANTY AND CONSEQUENTIAL DAMAGES MAY APPLY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. NOTE: FOR YOUR PROTECTION IN THE EVENT OF THEFT OR LOSS OF THIS PRODUCT, PLEASE FILL IN THE INFORMATION REQUESTED BELOW AND RETAIN WITH YOUR SALES RECEIPT.

MODEL NO.:	SERIAL NO.:
(LOCATED ON BACK OR BOTTOM OF UNIT)	
DATE OF PURCHASE:	
WHERE PURCHASED:	PURCHASE PRICE:

FOR MORE INFORMATION REGARDING SERVICE OR RETURN, CALL US TOLL FREE: 1-800-645-5516 IN METRO NY: 631-957-8700

ALWAYS USE DISCRETION WHEN INSTALLING VIDEO ANDIOR AUDIO SURVEILLANCE EQUIPMENT ESPECIALLY WHEN THERE IS AN EXPECTATION OF PRIVACY. INQUIRE REGARDING FEDERAL, STATE ANDIOR LOCAL REGULATIONS APPLICABLE TO THE LAWFUL INSTALLATION OF VIDEO ANDIOR AUDIO RECORDING OR SURVEILLANCE EQUIPMENT. PARTY CONSENT MAY BE REGUIRED.

Speco Technologies is constantly developing product improvements. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Rev. 220415