


AW-100WV

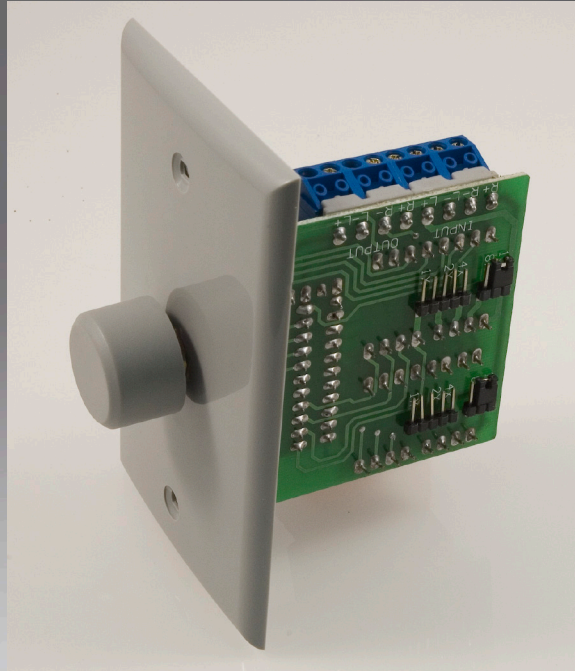

AW-IMP100WV
Impedance Matching

The **AW-100WV** is a 100 watt outdoor in-wall volume control. The **AW-IMP100WV** impedance matching volume control is identical with the exception that it can be configured to maintain a safe system load when multiple controls and speakers are connected. These controls utilize autoformers to efficiently transfer the power from amplifier to speaker. Autoformers are the electrical equivalent to a gearbox in an automobile with each of the 12 volume positions a different gear. It is common to use these controls with outdoor landscape speakers.

High Performance Outdoor Volume Controls

Smooth transition between volume steps

12-tap, high-grade 100-watt autoformer

100 Watts Max Power Handling per channel

2-5/8" mounting depth

Frequency Response: 20-20 kHz +/- 1dB

Removable Input / Output terminal strip

Stereo Control (Can be used in Mono Applications.)

Suitable for residential & commercial applications

Knob & Wallplate included

Gray in color

AW-100WV

Autoformer w/ Rotary 12 position switch


AW-IMP-100WV

Impedance Matching Autoformer
w/ Rotary 12 position switch

1X, 2X, 4X, 8X & 16X impedance multiplier

Protects amplifier by maintaining safe impedance

1X position allows use in ordinary applications

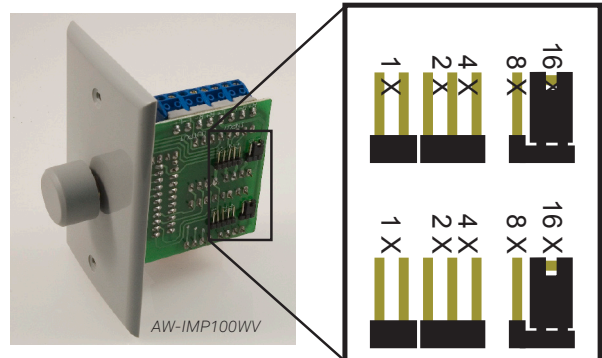

16X Position Shown