


High Mount
Outdoor Detector

HX-80RAMi

HX80RAMi

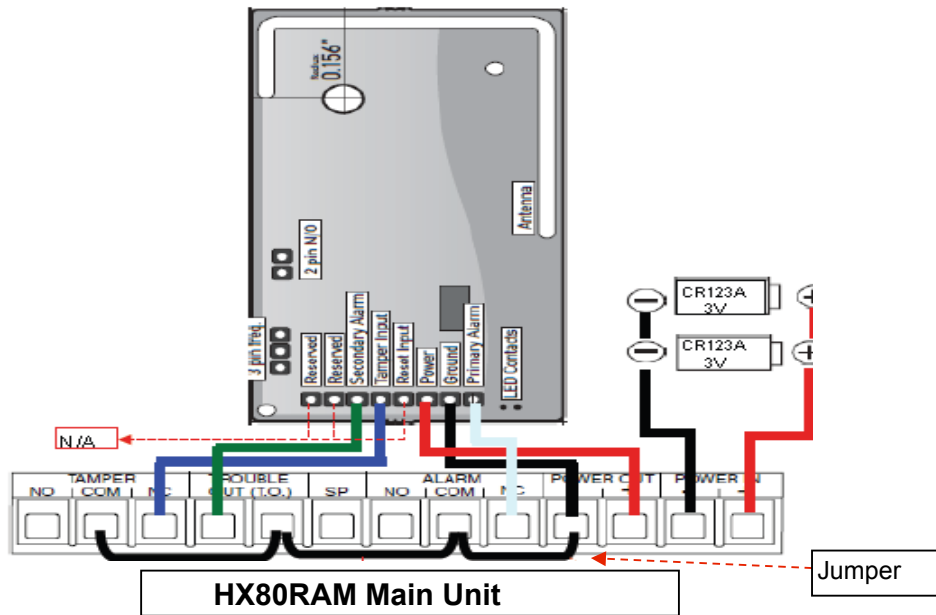

Pin	Wire Color	Terminal Wiring
1.	White	to NC Alarm Output – Primary Alarm
2.	Black	to Ground- Jumper to all Commons
3.	Red	to Positive
4.	Brown	to Reset Input- NA
5.	Blue	to NC Tamper-Tamper
6.	Green	to Trouble Output – Secondary Alarm
Ground all Commons		

OPTEX INCORPORATED (USA)
 TEL:+1-800-993-5770
 Tech:(800)966-7839
 URL:http://www.optexamerica.com