

DIP-Switch Coded Transmitter

SK-919T1-GBDQ 1 Button, 1 Channel

The ENFORCER DIP-Switch Coded Transmitter uses a DIP switch to set the code. Suitable for applications requiring large numbers of transmitters with identical codes. A secured site might want all engineers on a project to have access to the same buildings, while another working group might need access to a different set. Similarly, a gated community might want to have one code for all residents, with the ability to change the code if transmitters are lost or stolen.



Features

- Frequency 315MHz*
- Operates up to 500ft†
- LED Transmission and low battery indicator
- Includes 3VDC lithium battery (CR-2032)
- Compatible with all 315MHz SK-series receivers
- Over 68 billion (6.8x10¹⁰) possible codes
- Coding by 8-pin DIP switch providing 256 combinations
- Use for "block coding" or matching of an existing transmitter
- Easily pocketable pendant with golden key ring
- FCC ID: K4E919T2GDW

Up to 500ft*

DIP Switch Coding

Lithium Battery


LED Indicator

Specifications

Type	1-Channel RF Transmitter
RF Frequency	315MHz†
Number of buttons	1
Channels	1
Possible codes	Over 68 billion (6.8x10 ¹⁰)
Code combinations	256 possible codes with 8-pin DIP switch
Dimensions	1 1/4" x 2 3/16" x 5/16" (31.5x55x8 mm)

Coding and Battery Access

1. Open the case using a coin inserted in the notch next to the key ring.
2. All DIP switches are factory preset to ON (up).
3. To set your code, move any combination of the DIP switches to OFF using a small tool and note your choices.
4. Program your receiver to learn the code.

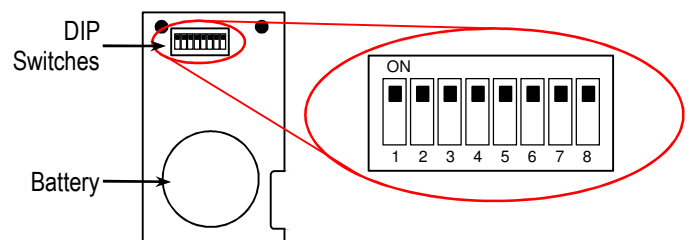

*Actual range will vary greatly depending on the installation and operating environment
†433.92MHz C€ version also available – SK-939T1-GBDQ

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2021 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.
SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_SK-919T1-GBDQ_210114