


## Relay Modules

Model No.	Supply Voltage	Trigger Voltage	Relay Rating	No. of Relays
<b>SR-2206-C5AQ</b> <i>Heavy duty</i>	6/12 VDC	6/12 VDC	5A	1 (DPDT)
<b>SR-2212-C5AQ</b> <i>Heavy duty</i>	12/24 VDC	12/24 VDC	5A	1 (DPDT)
<b>SR-1212-C2ALQ</b> <i>Low current, high sensitivity</i>	12/24 VDC	3~24 VDC	2A	1 (DPDT)
<b>SR-1212-C7ALQ</b> <i>Heavy duty, high sensitivity</i>	12/24 VDC	3~24 VDC	7A	2 (SPDT)
<b>SR-2112-C7AQ/10*</b> <i>Heavy-duty</i>	12/24 VDC	12/24 VDC	7A	1 (SPDT)


\*Breakaway 10-pack

### Features:

- Relay modules for any application where relays are required.
- Relays are pre-wired to easy-to-install modules.
- Screw terminals allow easy installation without soldering or other time-consuming connections.
- Wide-selection: Choose single or dual relays, low-current or heavy-duty operation, and high-sensitivity or normal-sensitivity.
- SR-2112-C7AQ/10: Ships with 10 relay modules on a single board, with easy break-away feature for use as individual modules.



SR-2206-C5AQ




SR-2212-C5AQ



SR-1212-C2ALQ



SR-1212-C7ALQ

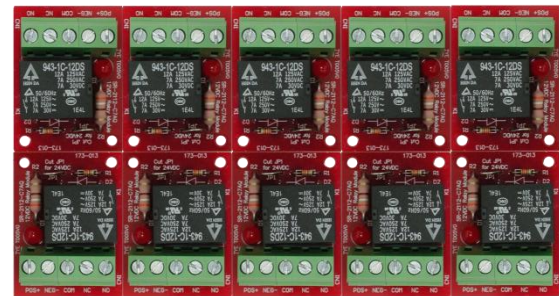

SR-2112-C7AQ/10  
(Sold as a breakaway 10-pack)

### Specifications:

	SR-2206-C5AQ	SR-2212-C5AQ	SR-1212-C2ALQ	SR-1212-C7ALQ	SR-2112-C7AQ/10
Supply voltage	6/12 VDC	12/24 VDC	12/24 VDC	12/24 VDC	12/24 VDC
Trigger voltage	6/12 VDC	12/24 VDC	3~24 VDC	3~24 VDC	12/24 VDC
Voltage selection	Auto-sensing	Jumper	Auto-sensing	Jumper	Jumper
Relay type	DPDT	DPDT	DPDT	SPDT	SPDT
Relay rating	5A	5A	2A	7A	7A
Number of relays	1	1	1	2	1
Current draw	70mA@6VDC 80mA@12VDC	70mA@12VDC	15mA@12VDC 18mA@24VDC	60mA@12/24 VDC	35mA@12VDC 40mA@24VDC
Size	2 <sup>3</sup> / <sub>4</sub> "x1 <sup>1</sup> / <sub>8</sub> "x <sup>3</sup> / <sub>4</sub> " (70x48x20mm)		2 <sup>3</sup> / <sub>4</sub> "x1 <sup>15</sup> / <sub>16</sub> "x <sup>3</sup> / <sub>4</sub> " (70x50x20mm)	2 <sup>3</sup> / <sub>8</sub> "x1 <sup>9</sup> / <sub>16</sub> "x <sup>3</sup> / <sub>4</sub> " (60x40x20mm)	1 <sup>9</sup> / <sub>16</sub> "x1 <sup>3</sup> / <sub>16</sub> "x <sup>3</sup> / <sub>4</sub> " (40x30x20mm)

PIRelayModules.docx

## SECO-LARM

16842 Millikan Ave • Irvine, CA 92606

Tel: 949-261-2999 / 800-662-0800 • Fax: 949-261-7326

sales@seco-larm.com • www.seco-larm.com



Copyright 2012 © SECO-LARM U.S.A., Inc. All rights reserved.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**ENFORCER® SECO-LARM CRIMEBUSTER® CBA SLI**