


Power Horn Remote Siren (110db) PSH01

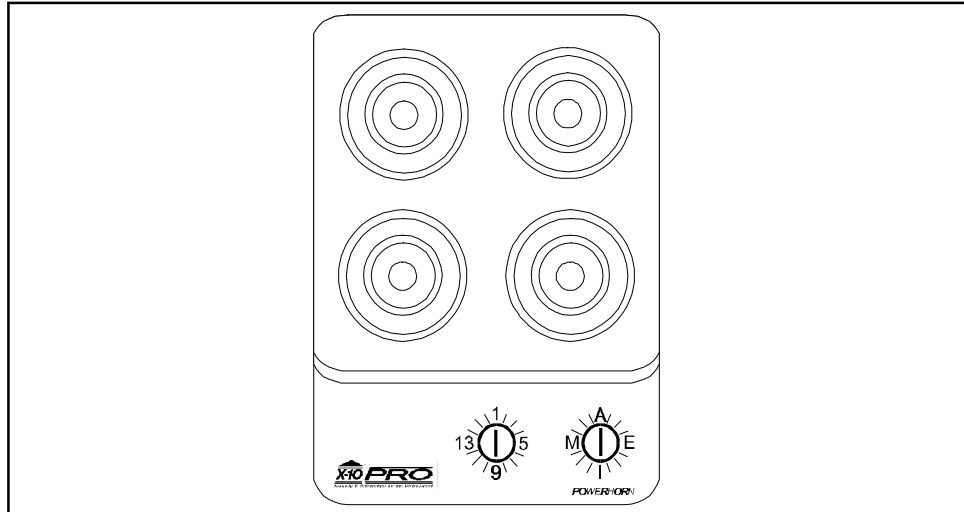

Installing the Power Horn

- Set the House Code wheel to the same house code as the Security System
Note: The house code for the Security System is downloaded by the security installation firm. The default is 'A', when using the PRO2000 Security Panel.
- Set the Unit Code wheel to the same code as the security light from the PRO2000 download.
Note: If the owner does not wish the Power Horn to be triggered when the security light is switched on, the security installation firm can re-configure the console to issue a sequence of All Lights On/All Units Off commands during an alarm instead of flashing just the security light. The unit code for the Power Horn can then be adjusted to any other (unused) setting, and will not be triggered when the security light is turned on.
- Plug the Power Horn into a convenient AC outlet, preferably an unswitched one to ensure that the Power Horn cannot be turned off accidentally.

Testing the Power Horn

- Repeatedly, press the ON button, followed by the OFF button, (at least twice each) on any X-10 controller or remote, such as a PHC01 Mini Controller, which corresponds to the same House Code and Unit Code as the Power Horn. After the siren starts, it will continue for 4 seconds after the last command is transmitted.
- Trigger the security system by pressing the PANIC button on the console or on a remote. The Power Horn will be activated automatically in the next 4 seconds after the alarm has been triggered and will continue for around 4 seconds after the system is disarmed.