

365-Day Annual Timer

SA-027HQ

Features:


- Two N.O. or N.C. Form C relays 10A@120VAC / 28VDC
- Each relay can be programmed for 50 events, for a total of 100 individual programmable events
- Events can be set weekly, daily, or hourly, over the course of an entire year
- Manual operation of relays without event programming
- One egress input per relay (2 total)
- Block programming allows events to be repeated
- First-person-in function interrupts the timer's normal operation
- Event outputs can be programmed disable, ON, OFF, shunt, or momentary (1~99 seconds)
- 10 Programmable holidays
- Password-protected programming
- Tandem mode allows both relays to operate simultaneously
- EEPROM Memory for data protection in case of power failure
- Built-in clock backup battery
- Built-in backup battery charger for external backup battery use
- Compensates for leap years
- Can be set for Standard or Daylight Saving Time
- Alphanumeric backlit LCD display for easy programming

Specifications:

Model	SA-027HQ	
Input voltage	12~24 VDC/VAC	
Number of relays	2	
Relay rating	10A@120VAC / 28VDC	
Current draw	70mA	
Number of programmable events	50 for each relay, 100 total	
Blue LED	ON	Power is ON
	OFF	Power is OFF
Number of programmable holidays	10	
Battery charging current	90mA	
Security code	4-digits, numeric, ON/OFF	
Dimensions	4 ³ / ₁₆ "x3 ¹ / ₁₆ "x1 ¹ / ₄ " (107x78x31 mm)	
Weight	5.8-oz (164g)	



Overview:

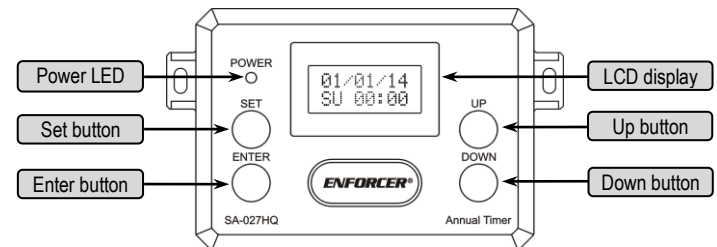

Also Available from SECO-LARM®:



SA-027WQ
7-Day Timer



SA-026Q
Miniature Timer Module



SA-025Q
Multi-Purpose
Programmable Timer

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®