


3/4" Steel Door Recessed-Mount Contact

SM-4104-TQ/W

1" (25mm) Gap, Closed Loop, White

Features:


- Used for steel framed doors and windows where space is limited or to avoid unsightly installations
- Strong one-piece construction
- Gold-plated terminals for longer expected life and reliability
- Screw terminals
- High-impact ABS plastic
- Switch and magnet have ribs for securing in holes
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- 1" (25mm) Gap
- Lifetime limited warranty



Specifications:

Circuit type		Closed loop
Operation gap		1" (25mm)
Color		White
Material	Case	High-impact ABS plastic
	Terminal	Gold-plated
Contacts		Iridium-plated
Contact rating	0.1A@100VDC (max)	
	1.0A@10VDC (max)	
	10W (max)	
Temperature		-15° ~ 160° F (-25° ~ 70° C)
Switch cycles		50 Million (0.1mA@5VDC)
Switch dimensions		1 ³ / ₁₆ " x 1 ⁵ / ₁₆ " x 3 ³ / ₈ " (30x24x9mm)
Magnet dimensions		1 ³ / ₁₆ " x 1 ⁵ / ₁₆ " x 1 ¹ / ₂ " (30x24x13mm)
Magnet		Rare-earth Neodymium

Dimensions:

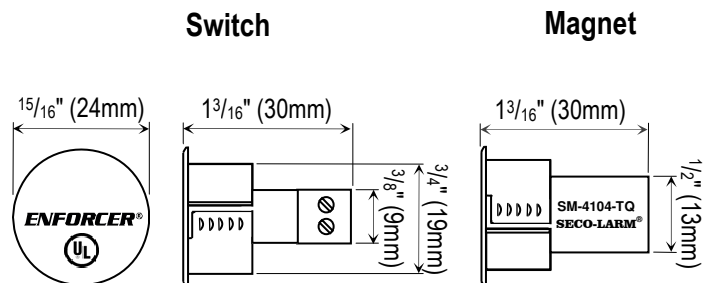

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PISM-4104-TQ_150604.docx