


## Sliding Glass Door Kit (SGDK) Bracket Sizing Guide

### Things to know to Determine which Sliding Glass Door Kit (SGDK) is right for you

1. A properly installed SGDK looks like this:
  1. Lock Centered in the middle of and internally framed sliding glass door when closed (slider on inside of house).
  2. Pushed up against the SGD frame with toe molding removed (if there is any). Watch our toe molding removal video for tips which is available on our YouTube Channel



2. Key Details & Dimensions for 2 kit options:
  - a. Both kits are made for left and right hand internally framed sliding doors (not externally framed)
  - b. Both kits comes with one bracket (Option A or B), two screws, and one strip VHB tape
  - c. Option A: depth 3/4 in
  - d. Option B: depth 1.5 in

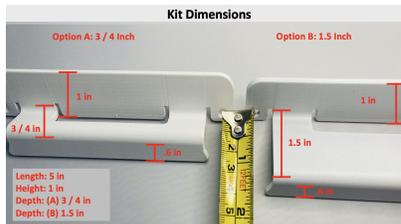


### Step 1: Determine if You Need Additional Risers

**Riser Check:** Determine if additional lock risers are needed.

- a) If your frame height is 1.5 inches to 2 inches you may need 1-2 risers.
- b) If your frame height is greater than 2 inches you will need multiple risers.
- c) If your frame height is less than 1.5 inches you may not need a riser.

**Notes:** Some frames are taller than others which may require additional risers. Each riser is 1/8" thick (every Havenlock comes with one riser included).

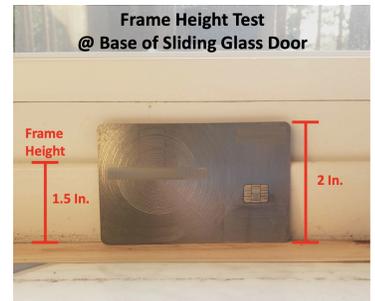

### Step 2: Determine Which Kit Option Works For You

**Kit Check:** Determine which kit is necessary based on frame depth. In order to choose the right bracket, place a penny (3/4" diameter) flat on the top of your frame ledge or hold it there in order to decide what bracket is best. Each kit works on a left or a right hand open sliding glass door.

- d) **Choose Option A:** If the frame depth is smaller than a penny.
- e) **Choose Option B:** If the frame depth is equal to or larger than a penny.
- f) **Neither option:** If the frame depth is larger than 1.5 inches, neither kit option will work for you contact us at support@havenlock.com.

