

24/28 VAC Rack Mount Power Supply

- PH-A1612-PUQ** 16 Outputs, 12A, PTC
- PH-A1612-GUQ** 16 Outputs, 12A, Glass
- PH-A3224-PUQ** 32 Outputs, 24A, PTC
- PH-A3224-GUQ** 32 Outputs, 24A, Glass



Attractive, high-tech industrial design


Features:

- ▶ Compact 1U height fits into standard 19" equipment racks
- ▶ Field-selectable power output: 24/28 VAC or OFF
- ▶ Status LEDs indicate if a fuse is tripped
- ▶ Flexible mounting options: rack, wall, and desk mounting
- ▶ Flexible cable management options
- ▶ Removable screw terminal blocks
- ▶ Overheat-protected power transformer(s) with thermal fuse
- ▶ Attractive, high-tech industrial design

Glass Fuse Models Only

- ▶ Front panel opens for easy fuse access—no tools needed

Allows for rack, wall, or desk & shelf mounting

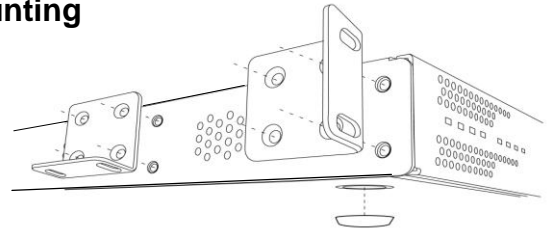


Specifications:

	A1612-PUQ	A1612-GUQ	A3224-PUQ	A3224-GUQ
Fuse type	PTC*	Glass	PTC*	Glass
Input voltage	120 VAC			
Number of outputs	16		32	
Total supply current	12A@24VAC max.		24A@24VAC max.	
	10A@28VAC max.		20A@28VAC max.	
Max. amps per ch.	3A@24VAC max.			
Rack size	1U 19" (44.5x483 mm)			
Dimensions	1 3/4" x 17 1/2" x 11 13/32" (45x445x290 mm)			
Weight	14-lb 14-oz (6.75kg)		22-lb 10-oz (10.25kg)	

*Positive Temperature Coefficient

Cable management brackets make for professional, organized wiring

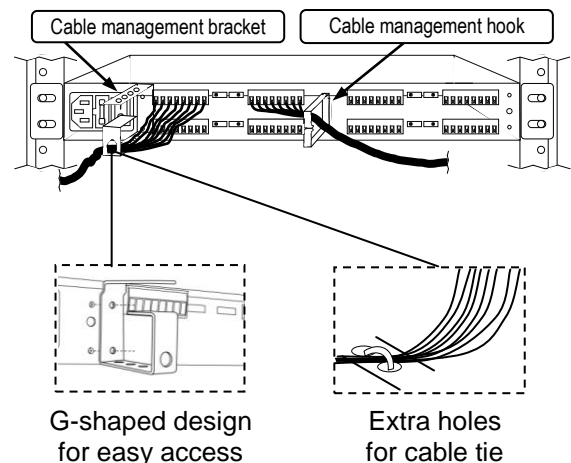

Sample Application:

